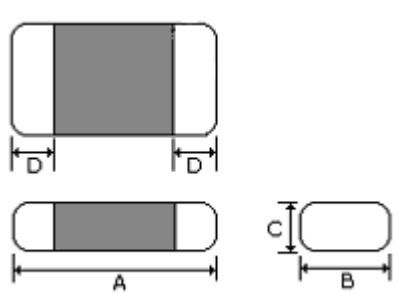


SPECIFICATION FOR APPROVAL

CUSTOMER:			DATE:		
PART NO: CL2012-3R3K-N			DWG.NO: SI3811121		
CUSTOMER PART NO:			CUST.DWG.NO:		
(1) DIMENSIONS (UNIT: mm) 			A	2.00 ± 0.2	m/m
			B	1.25 ± 0.2	m/m
			C	1.25 ± 0.2	m/m
			D	0.50 ± 0.3	m/m
			E		m/m
			F		m/m
			G		m/m
			H		m/m
			I		m/m
			J		m/m
(2) ELECTRICAL REQUIREMENTS					
L (uH)	3.3 ± 10%	TEST FREQ	10MHZ		
Q	45 (MIN)	TEST FREQ	10MHZ		
RDC (Ω)	0.8 (MAX)	TEST FREQ			
IDC (mA)	30 (MAX)	TEST FREQ			
TEST INSTRUMENTS HP4287A+16092A HP4291A HP4338B			APPROVED BY 吳載敏		
			CHECKED BY 張明德		
			DRAWN BY 黃慧診		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : CL2012-3R3K-N				DWG.NO : SI3811121					
CUSTOMER PART NO :				CUST.DWG.NO :					
ITEM	L (uH)	RDC (Ω)	IDC (mA)						
FREQ	10MHZ	10MHZ							
SPEC	3.3 ± 10%	0.8 (MAX)	30 (MAX)						
1	3.27	0.28	OK						
2	3.48	0.28	OK						
3	3.48	0.28	OK						
4	3.27	0.28	OK						
5	3.23	0.28	OK						
6	3.27	0.27	OK						
7	3.28	0.27	OK						
8	3.43	0.28	OK						
9	3.49	0.29	OK						
10	3.25	0.28	OK						
\bar{X}	3.345	0.279							
R	0.26	0.02							
							APPROVED BY		
							吳載敏		
							CHECKED BY		
			張明德						
			DRAWN BY						
			黃慧診						

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB: www.coremaster.com.tw