


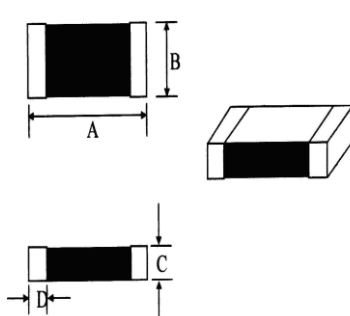


# SPECIFICATION FOR APPROVAL

CUSTOMER:			DATE:		
PART NO: LCB3216-260Y-N			DWG.NO: TE3207201		
CUSTOMER PART NO:			CUST.DWG.NO:		
(1) DIMENSIONS (UNIT: mm)  			A	$3.2 \pm 0.2$	m/m
			B	$1.6 \pm 0.2$	m/m
			C	$1.1 \pm 0.2$	m/m
			D	$0.5 \pm 0.3$	m/m
			E		m/m
			F		m/m
			G		m/m
			H		m/m
			I		m/m
			J		m/m
(2) ELECTRICAL REQUIREMENTS					
Z ( $\Omega$ )	$26 \pm 25\%$	TEST FREQ	100MHz / 100mV		
RDC ( $\Omega$ )	0.01 (MAX)	TEST FREQ			
IDC (mA)	6000 (MAX)	TEST FREQ			
TEST INSTRUMENTS HP 4338A MILLIOHMMETER HP 4291B RF IMPEDANCE / MATERIAL ANALYZER			APPROVED BY 		
			CHECKED BY 		
			DRAWN BY 		

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# TEST DATA

CUSTOMER :					DATE :									
PART NO: LCB3216-260Y-N					DWG.NO: TE3207201									
CUSTOMER PART NO :					CUST.DWG.NO :									
ITEM	Z (Ω)	RDC (Ω)	IDC (mA)		DIMENSION (UNIT : mm)									
					A	B	C	D						
FREQ	100MHz /100mV													
SPEC	26 ± 25%	0.01 (MAX)	6000 (MAX)		3.2 ± 0.2	1.6 ± 0.2	1.1 ± 0.2	0.5 ± 0.3						
1	30.6	0.002	OK		3.21	1.63	1.10	0.53						
2	30.8	0.002	OK		3.24	1.62	1.09	0.51						
3	30.4	0.003	OK		3.22	1.60	1.11	0.52						
4	28.8	0.002	OK		3.23	1.61	1.12	0.50						
5	29.7	0.002	OK		3.22	1.62	1.12	0.52						
6	30.4	0.003	OK		3.21	1.62	1.10	0.50						
7	30.7	0.002	OK		3.22	1.62	1.12	0.52						
8	30.5	0.003	OK		3.25	1.64	1.10	0.54						
9	30.4	0.002	OK		3.23	1.61	1.11	0.50						
10	30.0	0.002	OK		3.22	1.60	1.12	0.52						
$\bar{X}$	30.23	0.002			3.225	1.617	1.109	0.516						
R	2	0.001			0.04	0.04	0.03	0.04						
					APPROVED BY									
										CHECKED BY				
										DRAWN BY				



張明德

黃慧診

**CORE MASTER ENTERPRISE CO., LTD.**

TEL:886-2-8919-1288    FAX:886-2-8919-1298    WEB:www.coremaster.com.tw

# LCB3216-260Y-N

