
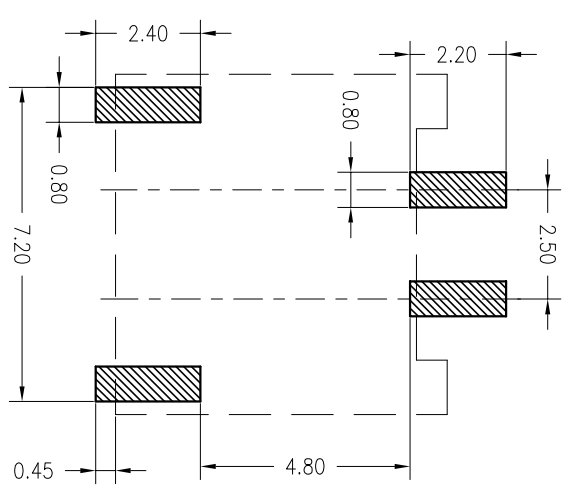

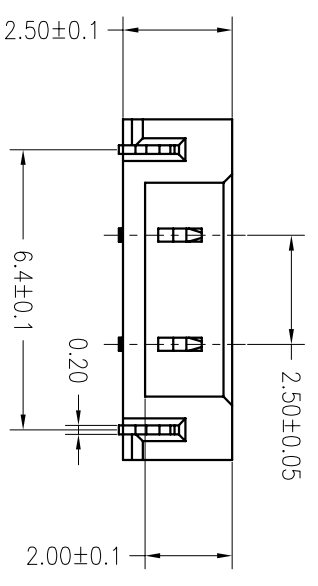


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2017.12.01

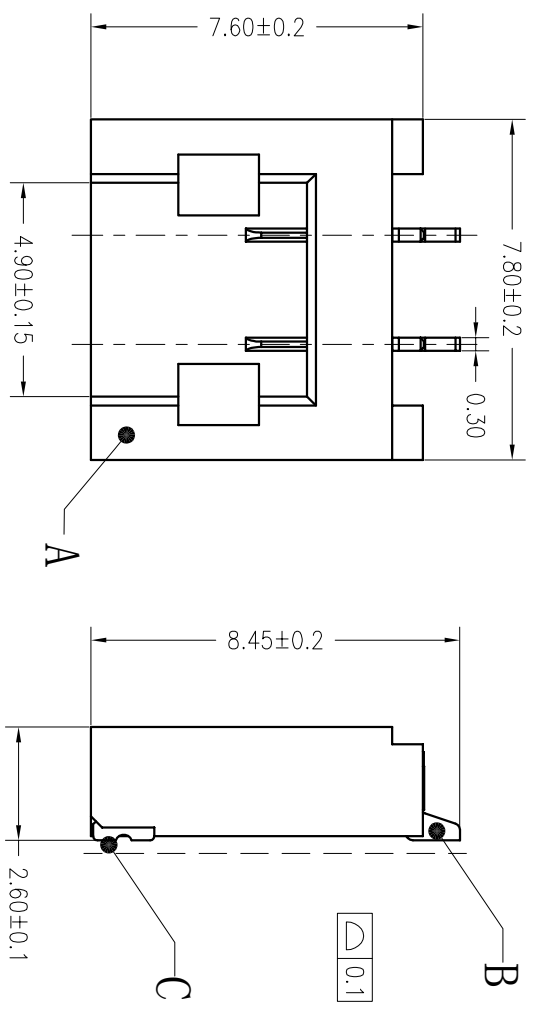

### Board Layout

#### ORDER INFORMATION:

**A2503AWR-02-F4MB1-R**  
 PART No. \_\_\_\_\_  
 Number of electrodes: \_\_\_\_\_  
 PLASTIC MATERIAL: 02  
 F4M=LCP(BERGE)  
 PACKAGING: R=REEL  
 Metal code: 1=PhosphorBronze  
 PLATING: B=MATTE Sn

### 主要技术参数 Main Specifications

线数 (Poles): 02  
 接触电阻 (Contact resistance):  $\leq 20m\Omega$   
 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$   
 额定电压 (Rated voltage): 250V AC DC  
 额定电流 (Rated current): 2.0A AC DC  
 耐电压 (Withstand Voltage): 1000V AC/minute  
 温度范围 (Temperature Range):  $-25^{\circ}C \sim +85^{\circ}C$

ITEM	COMPONENT	QTY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE SN
B	CONTACT	2 PCS	PhosphorBronze	MATTE SN
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOUR:BEIGE

<b>JKUN 温州健坤 有限公司</b> <b>WENZHOU JKUN CONNECTOR CO., LTD.</b>		TITLE: - 2.5mmPITCH 90°WAFER SMT TYPE	
X:±0.5 X:±0.3 .XX±0.25 --	X:±5° X:±2° .XX±1° --	USE: CUSTOMER APPD: 谭龙清 CHKD: 田峰	PART NO.: A2503AWR-02-F4MB1-R DWG NO.: JKUN/GCCP-0741 SCALE 1:1
UNITS: mm DR: 蒋建银			SHEET 1 / 1