


Back view

Order Information

L-KLS7-KW4-3Z-B122113L9

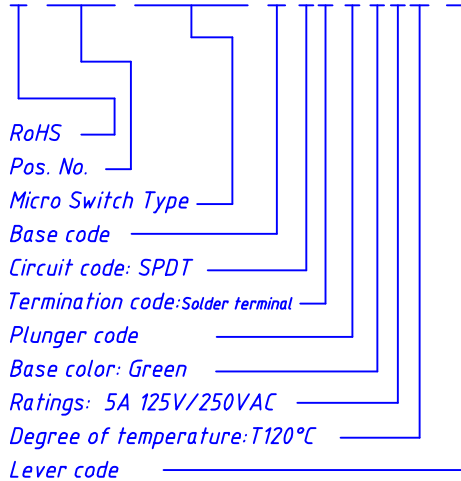

Note:

- Part Number: L-KLS7-KW4-3Z-B122113L9
- Rating: 5A 125/250VAC 40T120 5E4 5GPA 125/250VAC 40T120 5E4 10.1A 125/250VAC 40T120 5E4 4A 36VAC 40T120
- Contact Resistance: $\leq 50\text{mohm}$
- Switch Function: S.P.S.T
- Operating Force: 4.5N Max.
- Free Position: $13.1 \pm 0.8\text{mm}$
- IP Rating(dust, water): IP60
- Hi-prt between the lever and 1# Terminal: 3000VAC Min. 0.5mA
- Test voltage:
 - Between terminals of same polarity: AC1500V 50/60HZ
 - Between currentcarrying metal parts and ground(case): AC3750V 50/60HZ
- Life
 - Mechanical Life: 1,000,000cycles
 - Electrical Life: 50,000cycles
- Insulation Resistance: $100M\Omega$ Min. at DC500V 60S
- Solder: 260°C 3S

ANGLE TOLERANCE	PROJECTION		Description:
$\pm 1^\circ$	UNITS	mm	Micro Switch Type
	SHEET SIZE	A4	
GENERAL TOLERANCE			KLS P/N: L-KLS7-KW4-3Z-B122113L9
X. ± 0.30	Draw:	Daniel 2018-09-21	NingBo KLS ELECTRONIC CO.,L TD.
.X ± 0.20	Check:	Daniel 2018-09-21	
.XX ± 0.15	Rev.	05	