

**SPECIFICATION**

Current Rating: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 30mΩ Max.  
 Dielectric Voltage: 1000VAC for one minute  
 Operation Temperature: -40°C to +105°C

**MATERIAL**

Insulator: PBT, UL 94V-0  
 Contact Pin: Brass

**ORDER INFORMATION**

5 D I N R S 3 X N M - X X S O W A B - 0 1






Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRS3ANM-30***	30	2.54	A B C	
5DINRS3BNM-20***	20		A B -	
5DINRS3CNM-20***	20		A - C	
5DINRS3DNM-10***	10	5.08	A - -	
5DINRS3ENM-15***	15		A B C	
5DINRS3FNM-10***	10		A B -	
5DINRS3GNM-10***	10		A - C	
5DINRS3HNM-05***	05		A - -	

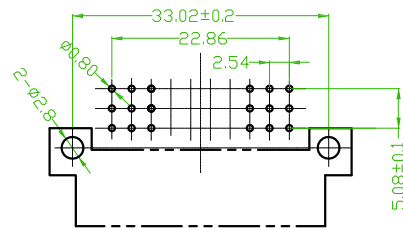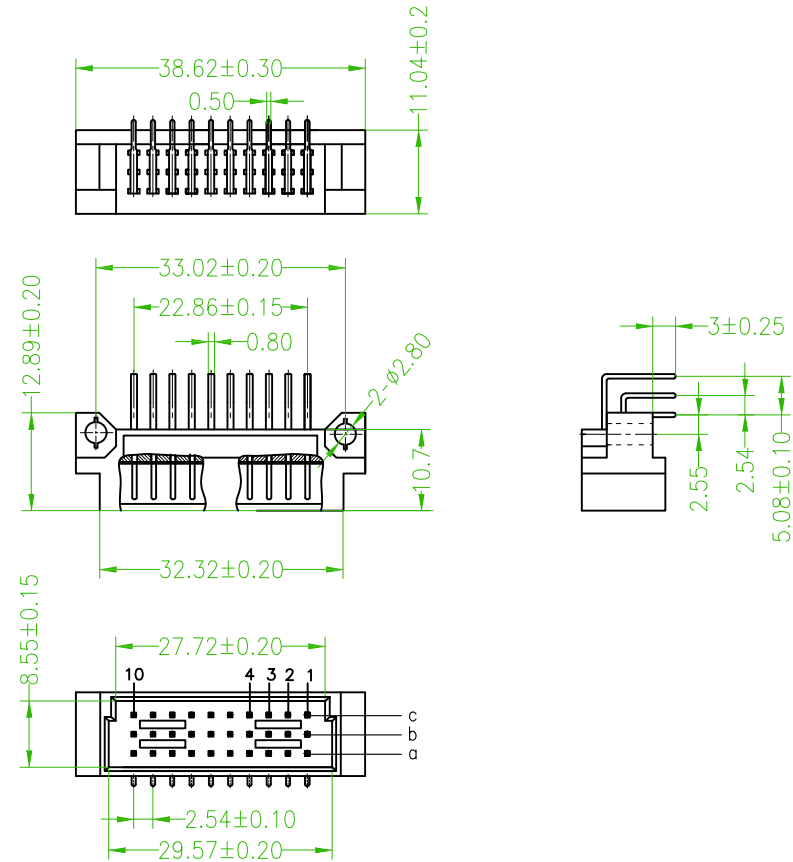

MOUNTING HOLES  
(BOTTOM VIEW)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	Revise the Table 1	Roy	2018/05/10

糧德精密有限公司  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	DIN 41612 3-R R/A DIP TYPE				頁數 Page	1/1
品號 PART NO.	5DINRS3XNM-XXS0WAB-01			繪圖 DRAWN	Eloise 2017/06/02	
圖號 DRAWING NO.	GN087-EL474		版本 REV.	B	核對 CHECKED	Josh 2018/05/10
客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	Jason 2018/05/10
公差 TOLERANCE	.X ± 0.30	X°±3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	