
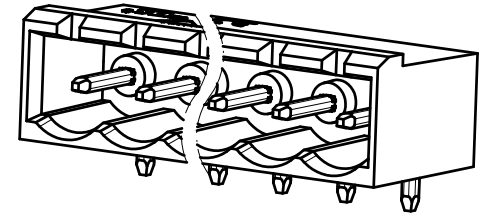
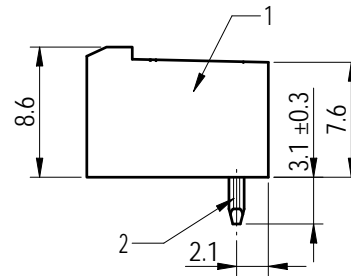
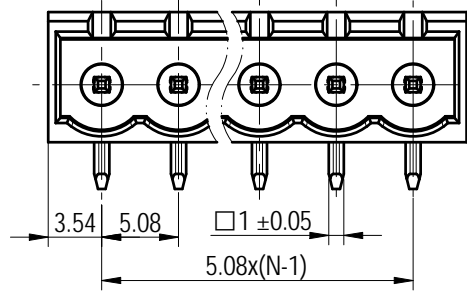
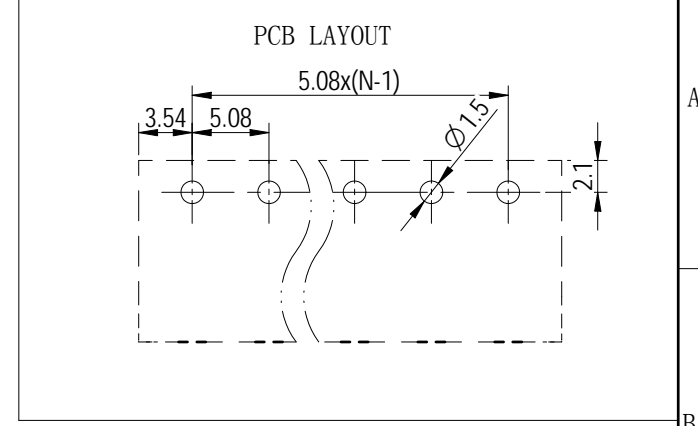


Transfer or duplication of this document as well as the utilization or reproduction of its contents are prohibited unless authorized in writing by DEGSON. All rights reserved for patent, utility model or design registrations. 除特别声明外，未经许可，任何单位和个人不得擅自复制、传播、使用、交流或向第三方提供。保留所有权利。

公差/General tolerances (mm)													D 0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'

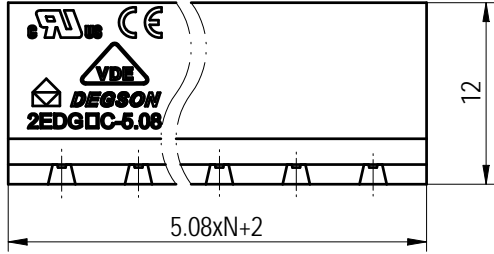

ITEM	NAME OF PART	MATERIAL	NOTES
2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	320/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

DEGSON

APPD: 兰春华 2022.07.13
 CHKD: 龚耀志 2022.07.13
 DRFT: 周锡锦 2022.07.13

MATERIAL:	SURFACE/COLOR:			
MAT NO./REV: - / 00	MAT STATUS: 批量			
NAME				
2EDGRC-5.08-XXP-1Y-100A&Z(H)				
DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
200083263	CUSTOMER DRAWING	已发布	2:1	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			周锡锦	2022.07.13

周锡锦 2022.07.13

周锡锦 2022.07.13

周锡锦 2022.07.13

周锡锦 2022.07.13