




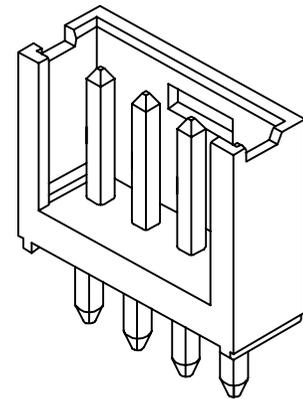


6	7	8	9
REV	Description	Person	DATE

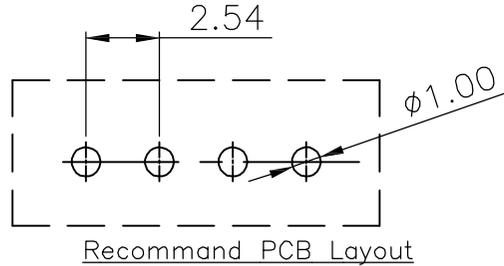


SPECIFICATIONS :
Voltage Rating: 250V AC / DC
Current Rating: 3A AC / DC
Withstanding Voltage: 1000V AC/minute
Temperature Range: -25°C~+85°C
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
After environmental testing: 40mΩ Max.

Material:
Wafer: PBT, UL94V-0. Black
PIN: Brass/Tin-Plated

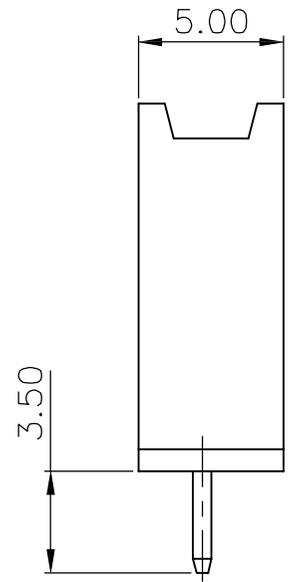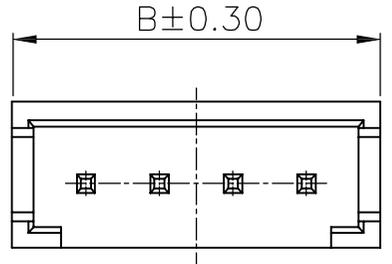

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
02P	2.54	7.62	13P	30.48	35.56
03P	5.08	10.16	14P	33.02	38.10
04P	7.62	12.70	15P	35.56	40.64
05P	10.16	15.24	16P	38.10	43.18
06P	12.70	17.78	17P	40.64	45.72
07P	15.24	20.32	18P	43.18	48.26
08P	17.78	22.86	19P	45.72	50.80
09P	20.32	25.40	20P	48.26	53.34
10P	22.86	27.94	21P	50.80	55.88
11P	25.40	30.48	22P	53.34	58.42
12P	27.94	33.02			

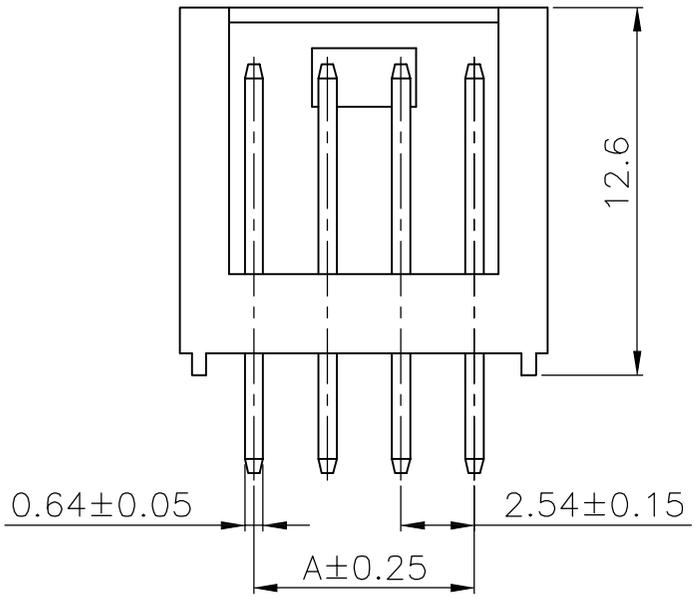

未注公差	单位 UNIT	第三角投影	比例 SCALE	日期 DATE	品名 PRODUCT NAME	2.54mm Single Dip Header
.X ±0.40	mm		1 : 1 (A4)	2012/08/16	图号 DRAWING NO.	
.XX ±0.25	核准	审核	设计	绘图	产品料号 RART NUMBER	L-KLS1-TEA-2.54-1X04-S
.XXX±0.15				Minda Lee	版次	A
ANG. ±5°					KLS ELECTRONIC CO., LTD	