

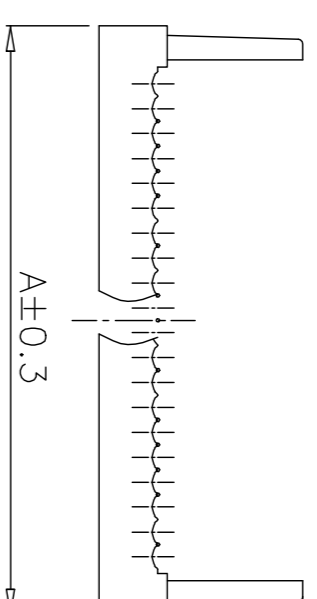
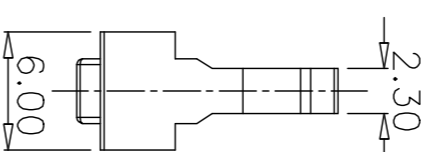
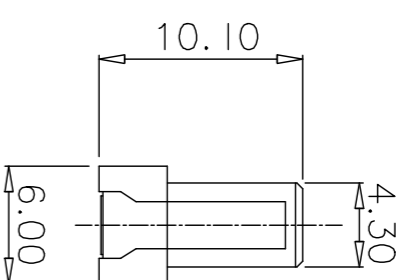


HOUSING WITH CONTACT

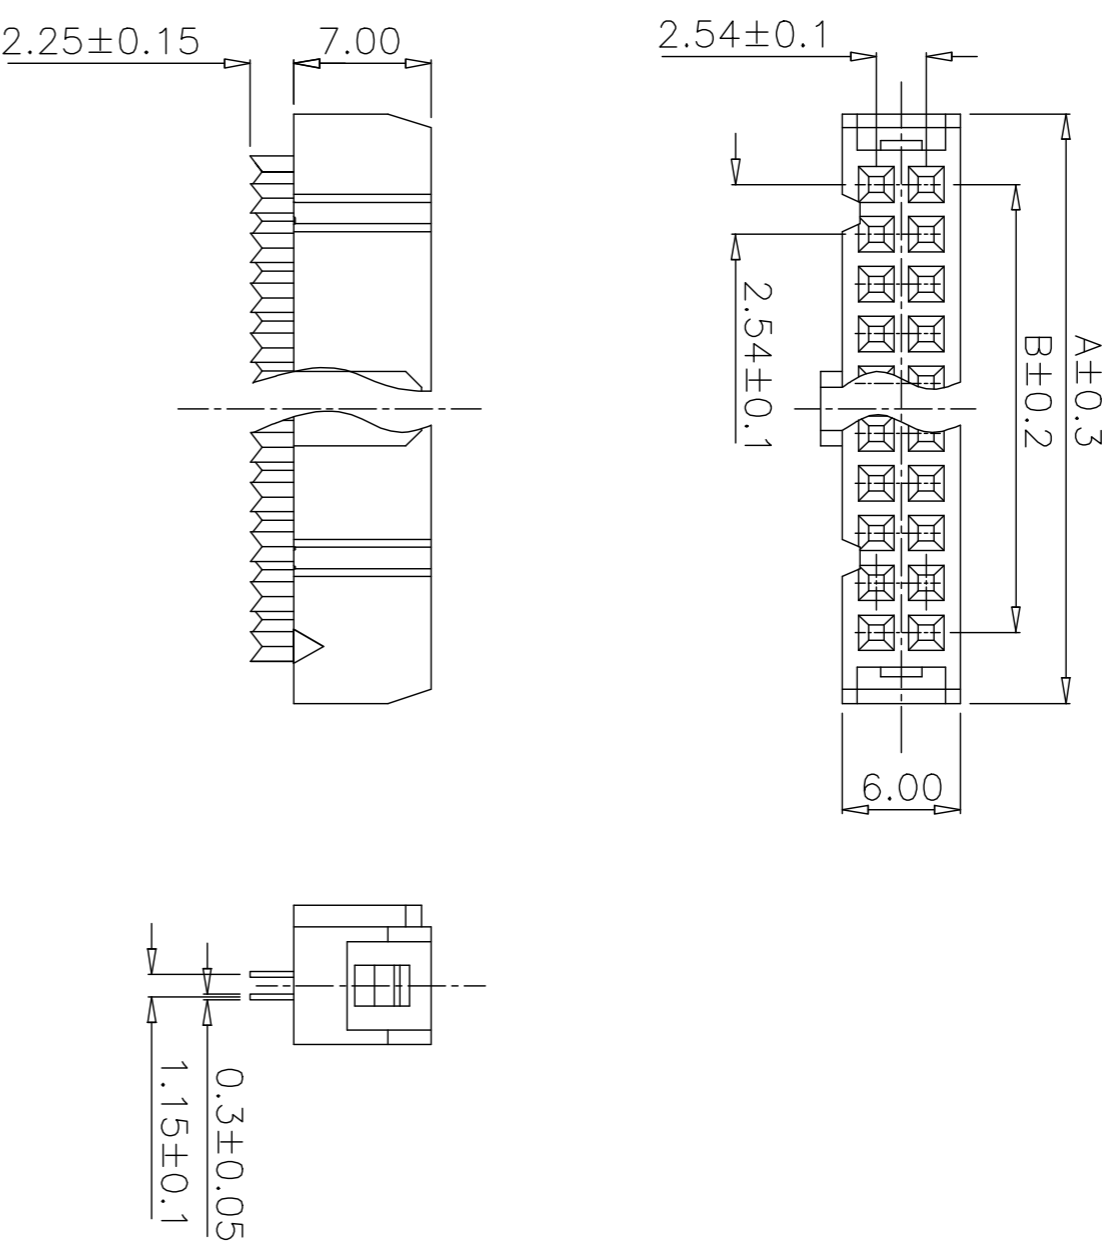

TOP COVER

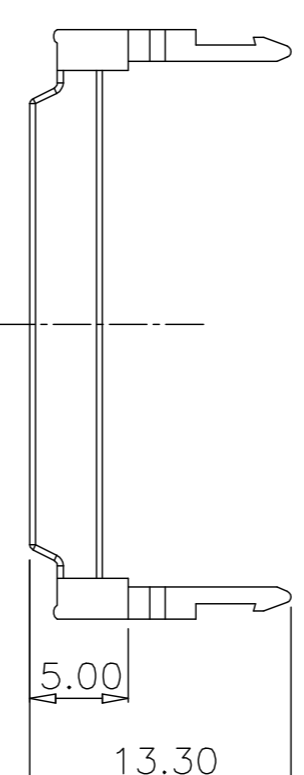

Position	Dimension	
	A	B
06	12.28	5.08
08	14.82	7.62
10	17.36	10.16
12	19.90	12.70
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

UPPER COVER

ORDER INFORMATION

Z B 1 0 0 5 - X X

X

X

X

HOUSING COLOR
G:GRAY
B:BLACK

SERIES NO	No. OF CONTACTS
06	08
16	20
34	40
40	50
60	60
64	64

CONTACT PLATING
1. FULL GOLD
2. FULL NICKEL
4. GOLD+NICKEL

COVER
M: W/
N: W/D

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: $20m\Omega$ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: $500V$ AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: $10000M\Omega$ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: $-40^{\circ}C \sim +105^{\circ}C$.

IDC SOCKET PITCH 2.54mm TYPE

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	SK	DATE	SIZE	A4	UNITS
CHIK		DATE	UNITS	MM	SCALE
APP		DATE			

ZB1005-XXP

ZHONGBA
NINGBO ZHONGBA PHOTOVOLTAIC TECHNOLOGY CO.,LTD

DWGNO