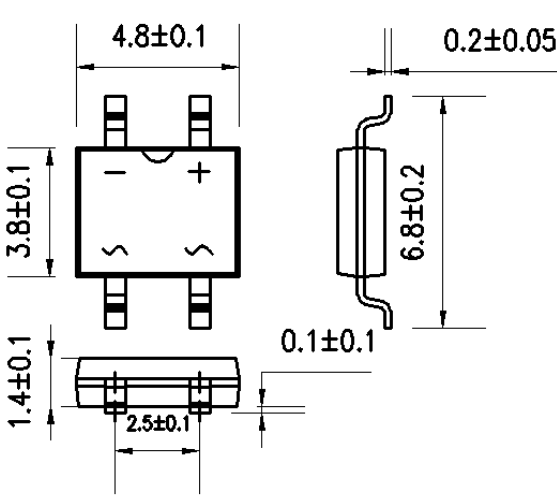


MINI 单相全波表面贴装整流桥产品规格书  
MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER

# MB05F THRU MB10F

<p style="text-align: center;">MBF</p>  <p style="text-align: center;">单位: mm</p>	<p>反向电压: 50--1000 伏 <b>REVERSE VOLTAGE: 50 to 1000 VOLTS</b> 正向电流: 1 安培 <b>FORWARD CURRENT: 1 AMPERE</b></p> <p style="text-align: center;"><b>特征 FEATURES</b></p> <ul style="list-style-type: none"> <li>● 玻璃钝化芯片 Glass Passivated Die Construction</li> <li>● 正向浪涌承受能力强 High Forward surge capability</li> <li>● 低正向压降 Low Forward Voltage Drop</li> <li>● 高温焊接保证 High temperature soldering aranted:260°C/10 秒</li> <li>● 引线 and 管体皆符合 RoHS 标准 Lead and body according with RoHS standard</li> </ul> <p style="text-align: center;"><b>机械数据 Mechanical Date</b></p> <ul style="list-style-type: none"> <li>● 封装: MBF 封装 MBF small outline plskage</li> <li>● 极性: 按极性激光印字与脚位 As Marked on Case</li> <li>● 环氧树脂 UL 易燃等级 Epoxy UL:94V-0</li> <li>● 安装位置: 任意 Mounting Position:Any</li> </ul>
--	--

极限值和温度特性 (TA=25°C除非另有规定) Ratings at 25°C ambient temperature unless otherwise specified

参数 Parameters	符号 Symbol	MB05F	MB1F	MB2F	MB4F	MB6F	MB8F	MB10F	Units
最大可重复峰值反向电压 Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
最大均方根电压 Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
最大直流阻断电压 Maximum DC Blocking oltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
最大正向平均整流电流 Maximum Average Forward Rectified Curren@Ta=40° C	$I_{(AV)}$	1							Amp
正向不重复浪涌电流 8.3ms 单一正弦半波 Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load	$I_{FSM}$	35							Amp
单位时间内承受的最大电流 $I^2t$ Rating for Fusing (t<8.3ms)	$I^2t$	5.0							$A^2s$
最大正向电压 Maximum Forward Voltage at 0.5A DC and 25°C	$V_F$	1.0							Volts
最大反向电流@VDC Maximum Reverse Current at Ta=25°C	$I_R$	5.0							uAmp
最大反向电流@VDC Maximum Reverse Current at Ta=125°C		500							
典型结电容 VR=4.0V, f=1MHZ Typical Junction Capacitance	$C_J$	13							PF
典型热阻 Typical Thermal Resistance	$R_{\theta JA}$	60							°C/W
工作结温和存储温度 Operating and Storage Temperature Range	$T_J, T_{stg}$	-55 to +150							°C

MINI 单相全波表面贴装整流桥产品规格书  
MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER

特性曲线 Characteristic Curves ( $T_A=25\text{ }^\circ\text{C}$  unless otherwise noted)

Fig.1 Derating Curve For Output Rectified Current

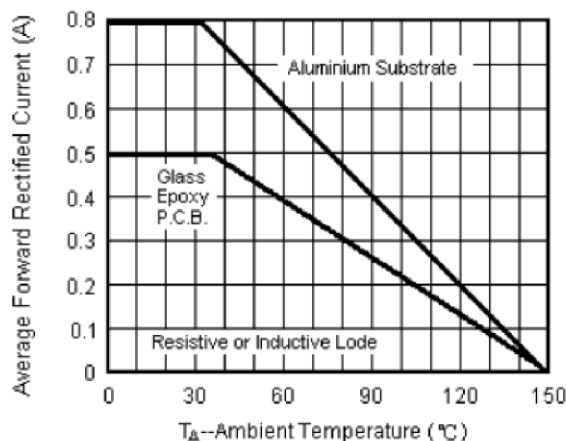


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg

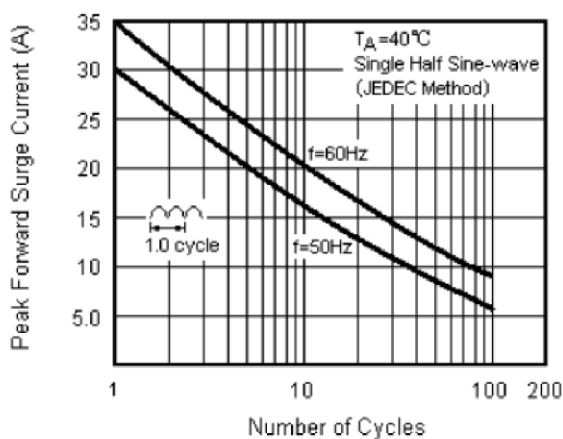


Fig.3 Typical Forward Voltage Characteristics Per Leg

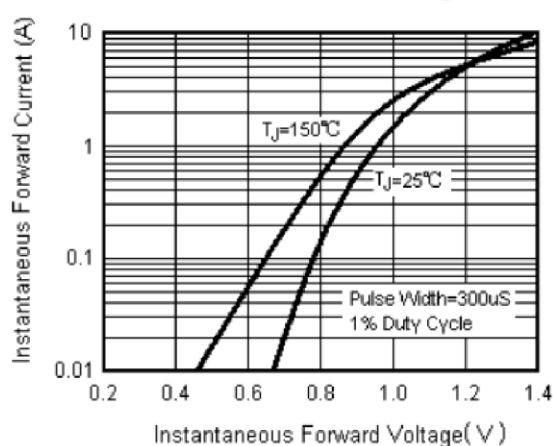


Fig.4 Typical Reverse Leakage Characteristics Per Leg

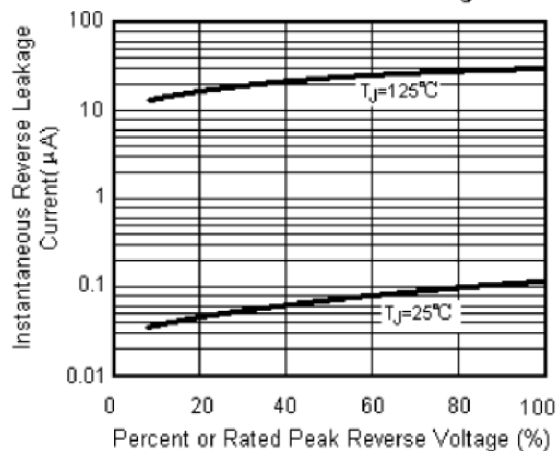


Fig.5 Typical Junction Capacitance Per Leg

