


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

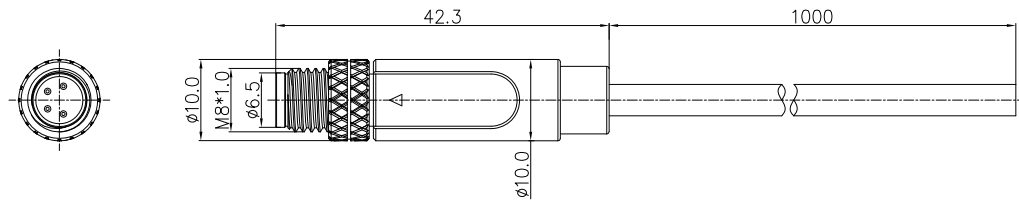

Detailed product Description:

1. Waterproof connector rating is IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc
3. Wire cross section: 3Pin~5Pin (24#)0.25mm², 6Pin 8Pin (26#)0.14mm²
4. Material conductor insulation: PVC

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA
4. Operating temperature: -25℃~+85℃

4.BK 3.BU 1.BN	4.BK 3.BU 2.WH 1.BN	5.GY 4.BK 3.BU 2.WH 1.BN	6.PK 5.GY 4.BK 3.BU 2.WH 1.BN	8.RD 7.BU 6.PK 5.GY 4.YE 3.GN 2.BN 1.WH

Pin Out

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance	Insulation Resistance
		A/C	D/C			
PM-M8A-03P-MM-SL7A01-00AH		60V	60V	4A	10mΩ	>100MΩ
PM-M8A-04P-MM-SL7A01-00AH		60V	60V	4A	10mΩ	>100MΩ
PM-M8B-05P-MM-SL7A01-00AH		30V	30V	3A	10mΩ	>100MΩ
PM-M8A-06P-MM-SL7A01-00AH		30V	30V	2A	10mΩ	>100MΩ
PM-M8A-08P-MM-SL7A01-00AH		30V	30V	1.5A	10mΩ	>100MΩ

DETACHED LISTS	PART NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: WYL 09/10/15"	NAME: PM-M8X-XXP-MM-SL7A01-00AH		
	CHKD: BY 9/2/15"	TITLE: CUSTOMER DRAWING		REV DO
	DRFT: YJH 01/11/15"	DRAWING NO.:		SHEET 1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1