

REVISION RECORD



REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

Detailed product Description:


1. Waterproof connector rating is IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc
3. Wire cross section: 3Pin~5Pin (24#)0.25mm², 6Pin 8Pin (26#)0.14mm²
4. Material conductor insulation: PVC

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA
4. Operating temperature: -25°C~+85°C

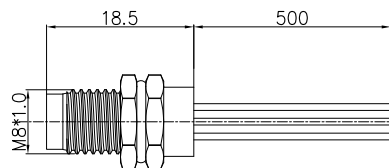

Cut Out



4.BK 3.BU 1.BN	4.BK 3.BU 2.WH 1.BN	5.GY 4.BK 3.BU 2.WH 1.BN	6.PK 5.GY 4.BK 3.BU 2.WH 1.BN	8.RD 7.BU 6.PK 5.GY 4.YE 3.GN 2.BN 1.WH

Pin Out

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance	Insulation Resistance
		A/C	D/C			
SS-M8A-03P-MM-SF7C50-00AH		60V	60V	4A	10mΩ	>100MΩ
SS-M8A-04P-MM-SF7C50-00AH		60V	60V	4A	10mΩ	>100MΩ
SS-M8B-05P-MM-SF7C50-00AH		30V	30V	3A	10mΩ	>100MΩ
SS-M8A-06P-MM-SF7C50-00AH		30V	30V	2A	10mΩ	>100MΩ
SS-M8A-08P-MM-SF7C50-00AH		30V	30V	1.5A	10mΩ	>100MΩ

DETACHED LISTS	PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: WYL 08/10/16"		NAME: SS-M8X-XXP-MM-SF7C50-XXAH		
	CHKD: BY 08/10/16"		TITLE: CUSTOMER DRAWING		
	DRFT: YJH 07/11/16"		REV	DO	
	THIRD ANGLE PROJECTION		DRAWING NO.:	SHEET	1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1	