


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

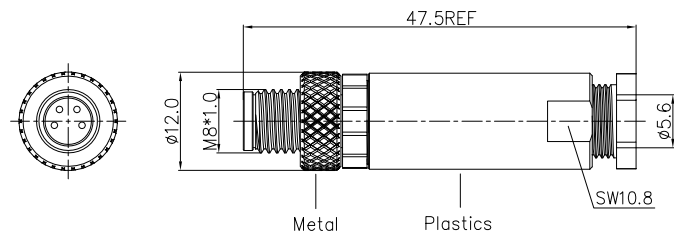

Detailed product Description:

1. Waterproof connector rating is IP67
2. Protected from dust and water during immersion, resistant to many oils and chemical etc
3. Wire cross section: (24#)0.25mm²~(22#)0.34mm²

Other Specification:

1. Contact PIN: Phosphor Copper with Gold plating
2. Coupling nut/screw: Brass with nickel plating
3. Insulation plastic: PA
4. Degree of protection: IP67
5. Operating temperature: -25℃~+85℃

Electrical character

Prat Number	Contacts	Rated Voltage		Rated Current	Contact Resistance	Insulation Resistance	Cable OD (mm)
		A/C	D/C				
PB-M8A-03P-MM-SL7001-00AH		60V	60V	4A	10mΩ	>100MΩ	3.0~5.0
PB-M8A-04P-MM-SL7001-00AH		60V	60V	4A	10mΩ	>100MΩ	3.0~5.0

DETACHED LISTS	PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: WYL 7/10/16"	NAME: PB-M8A-XXP-MM-SL7001-00AH			
	CHKD: BY 7/2/16"	TITLE: CUSTOMER DRAWING		REV	DO
	DRFT: YJH 3/11/16"	DRAWING NO.:		SHEET	1/1
 THIRD ANGLE PROJECTION		 MM (INCH)	DO NOT SCALE DRAWING	SCALE	1: 1