
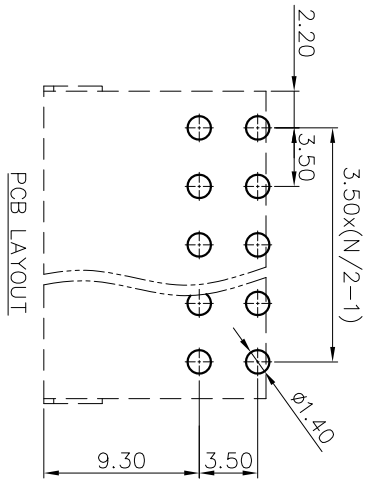

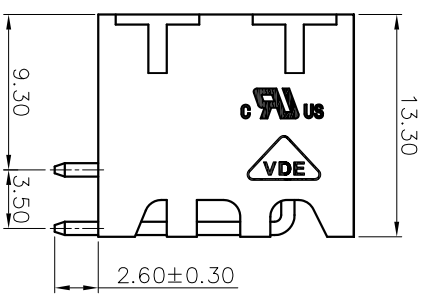
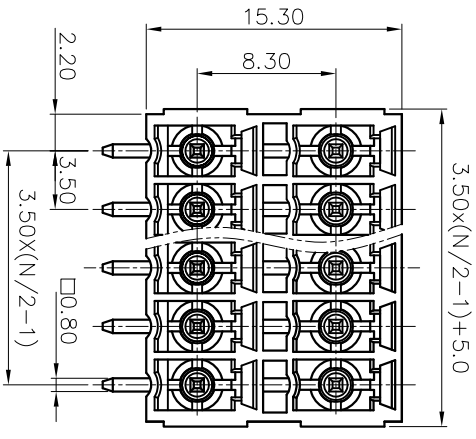


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



NOTES1:
 UL Standard
 1. Rated voltage/current : 300V / 8A
 2. Withstanding voltage : AC1600V/1Min.
 IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 3.5mm, Poles : N=04~48P
 3. Operating temperature: -40°C~+130°C
 4. Undimensioned tolerances:

Pitch range	in mm		Nominal dimension		range		mm
	Over	TO	Over	TO	Over	TO	
6	10	10	30	60	100	150	0.1/10
10	10	24	30	60	100	150	≤
15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

5. RoHS Compliance

15EDGRHB-THR - 3.5 - XXP - 1Y - 10A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (RoHS)
 10A - (Standard)
 (Color) : 1. (Grey)
 3. (Black)
 5. (Orange)

PART NO.: /		NAME: DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD: /	CHKD: /	TITLE: CUSTOMER DRAWING	
DRFT: /		DRAWING NO.: /	REV: DO
THIRD ANGLE PROJECTION		SCALE: 1:1	SHEET: 1/1

DETACHED LISTS