



PJESD5V6LC-4~PJESD6V8LC-4

FEATURES


- Based on the electrostatic discharge immunity test (IEC61000-4-2), the product assures the minimum endurance of 8kV.
- Capacitance is small with 10pF (at $V_R=0V, f=1MHz$) between the terminal. It is excellent in the frequency characteristic.
- With 4 elements mounted (common anode) in the 5-pin mini mold package, that product can cope with high density assembling.
- Lead free in compliance with EU RoHS 2.0
- Green molding compound as per IEC 61249 standard

MECHANICAL DATA

- Case : SOT-23 5L, Plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.00053 ounces, 0.015 grams

SOT-23 5L

Unit : inch(mm)

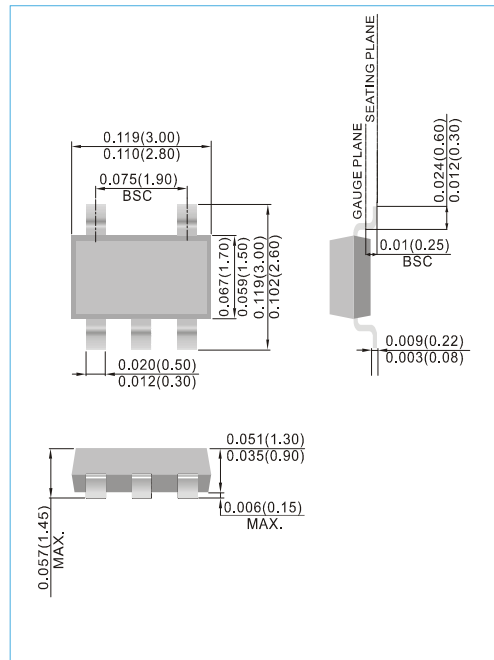


MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Peak Dissipation	P	200	mW
Surge Reverse Power	PRSM	2	W
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-55 to 150	°C

ELECTRICAL CHARACTERISTICS

Part Number	Breakdown Voltage V _{BR} Note 1			Dynamic impedance Z _d (Ω)		Reverse Leakage I _R (μA)		Capacitance C _t (pF)		ESD Voltage (kV) Note 3		Marking Code
	MIN.	MAX.	I _t	MAX.	I _T (mA)	MAX.	V _R (V)	TYP.	Test Condition	MIN.	Test Condition	
	V	V	mA	MAX.	I _T (mA)	MAX.	V _R (V)	TYP.	Test Condition	MIN.	Test Condition	
PJESD5V6LC-4	5.32	5.88	1	80	5	0.5	3.3	10	V _R =0V f=1MHz	8	C=150pF R=300Ω Contact discharge	SAT
PJESD6V8LC-4	6.37	7.04	1	30	5	0.5	5.0	7		8		SAV





PJESD5V6LC-4~PJESD6V8LC-4

TYPICAL CHARACTERISTICS (T_A=25°C)

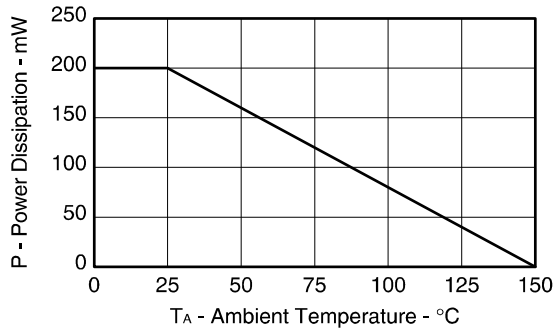


Figure 1.P-TA RATING

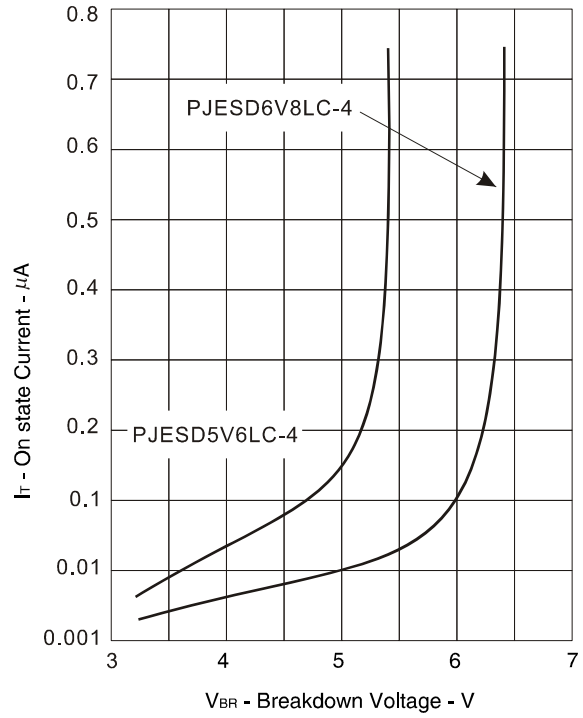


Figure 2.IT-VBR CHARACTERISTICS

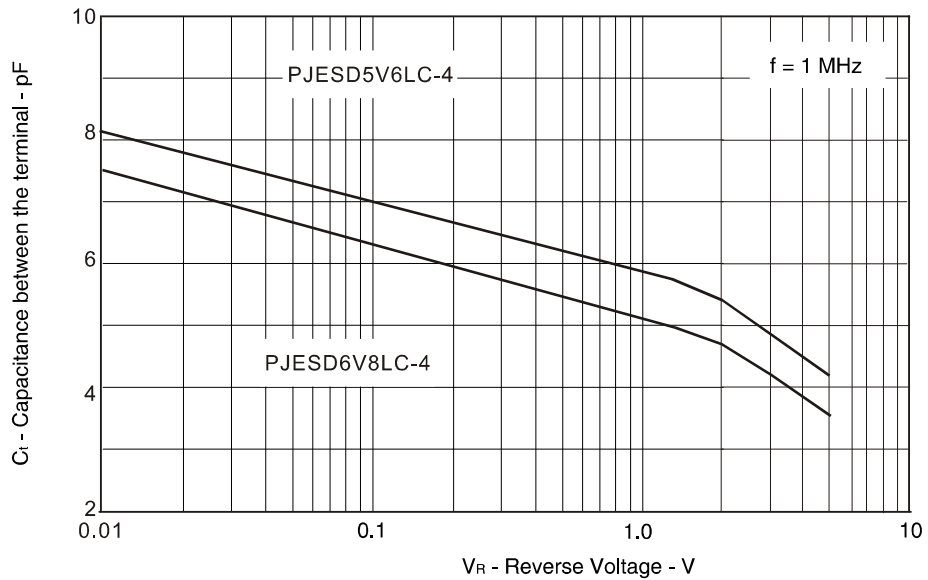


Figure 3.CT-VR CHARACTERISTICS



PJESD5V6LC-4~PJESD6V8LC-4

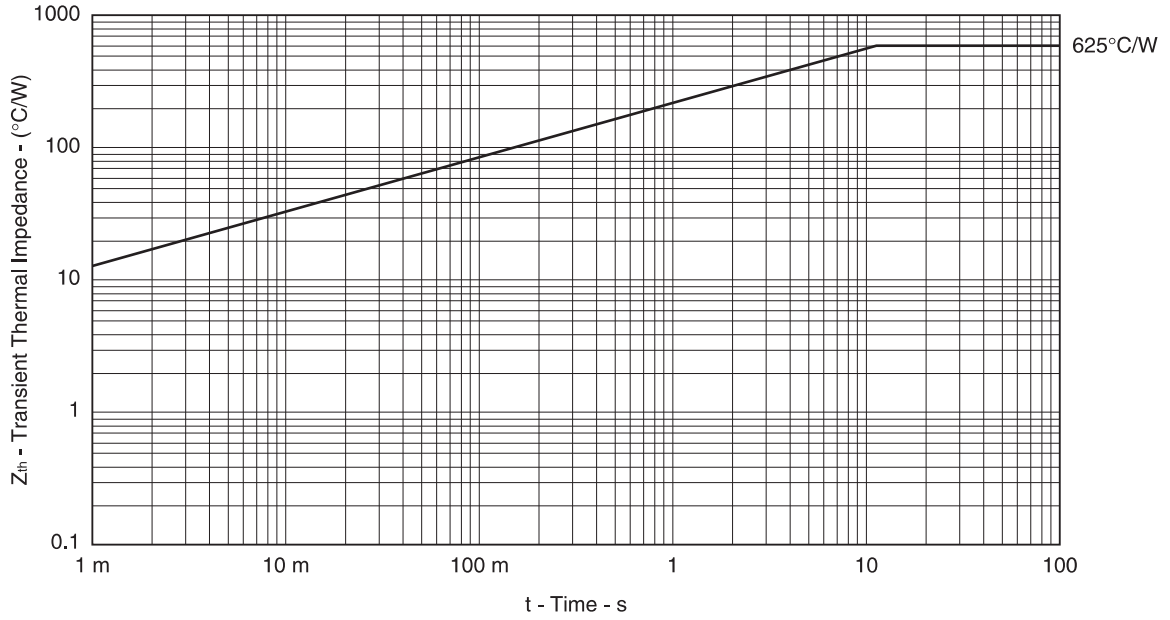


Figure 4. TRANSIENT THERMAL IMPEDANCE


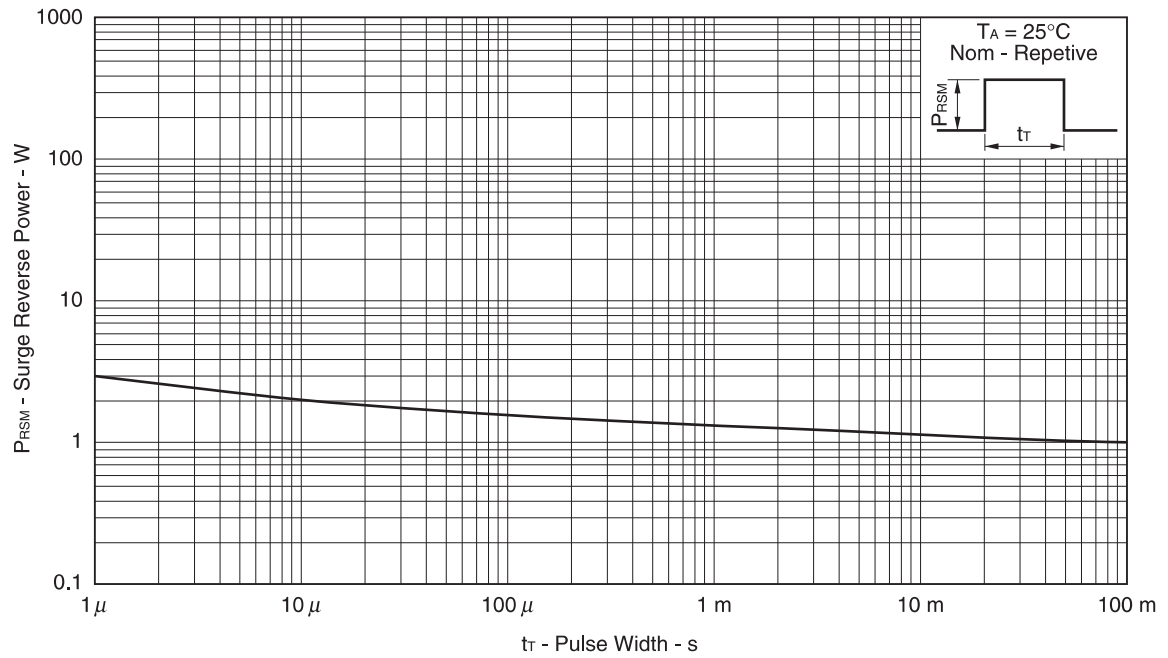


Figure 5. SURGE REVERSE POWER RATING



PJESD5V6LC-4~PJESD6V8LC-4

MOUNTING PAD LAYOUT

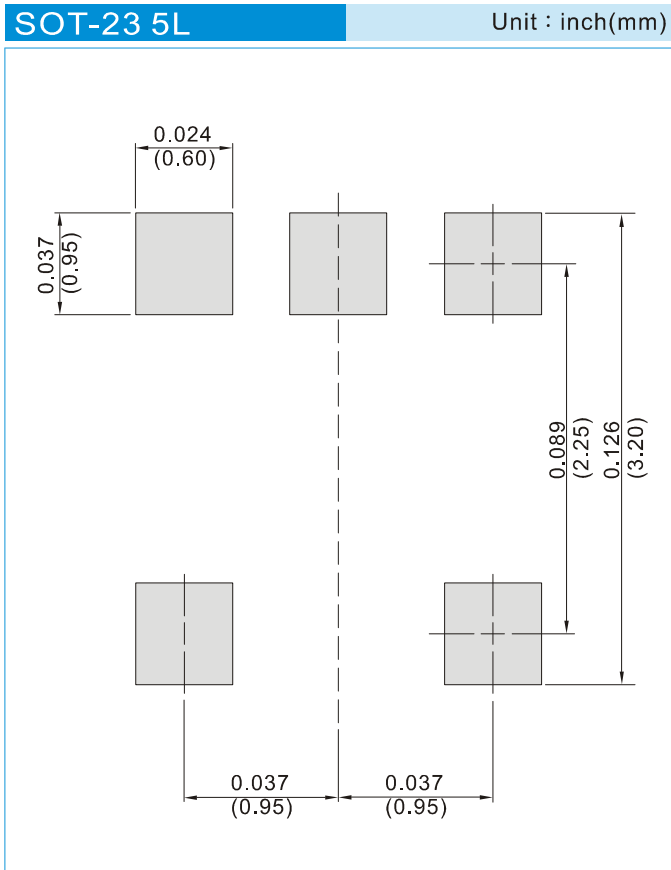

ORDER INFORMATION

- Packing information
T/R - 12K per 13" plastic Reel
T/R - 5K per 7" plastic Reel



PJESD5V6LC-4~PJESD6V8LC-4

Part No_packing code_Version

PJESD5V6LC-4_R1_00001

PJESD5V6LC-4_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



PJESD5V6LC-4~PJESD6V8LC-4

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.