

USB Connector Series

KLS1-146 (USB 3.0 AF DIP TYPE) Series






Material

Housing: 30% Glass filled PBT UL94V-0, Blue
Terminal :copper alloy(T=0.25mm), Au Plated on contact area;
Tin Plated on solder area;

Shell : Brass,Nickel plated

Electrical Characteristics

Current Rating: 1.8A for pin 1 & pin 4
0.25A other contacts
Contact Resistance: 30m Ohm Max. for pin 1 & pin 4
50m Ohm Max. for other contacts
Insulator Resistance: 100M Ohm Min.
Dielectric Withstanding Voltage:100 VAC / Minute

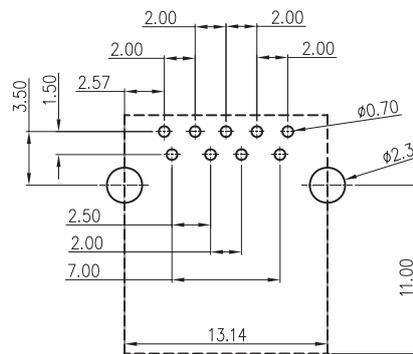

ORDER INFORMATION

Product NO.: **KLS1 - 146 - L**

Pos. NO. _____ Color: Blue
USB 3.0 AF DIP TYPE _____