



# SX52F~SX56F

## SCHOTTKY BARRIER RECTIFIER

**VOLTAGE** 20-60 Volt **CURRENT** 5 Ampere

### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications in order to optimize board space
- Low power loss,high efficiency
- High surge capacity
- Ultra thin profile package for space constrained utilization
- Package suitable for automated handling
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)
- Green molding compound as per IEC61249 Std. . (Halogen Free)

### MECHANICAL DATA

Case : SMAF, Plastic


Terminals : Solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end


Standard packaging : 12mm tape (EIA-481)

Weight : 0.0012 ounces, 0.0328 grams

Marking : Part number



**SMAF** Unit : inch(mm)

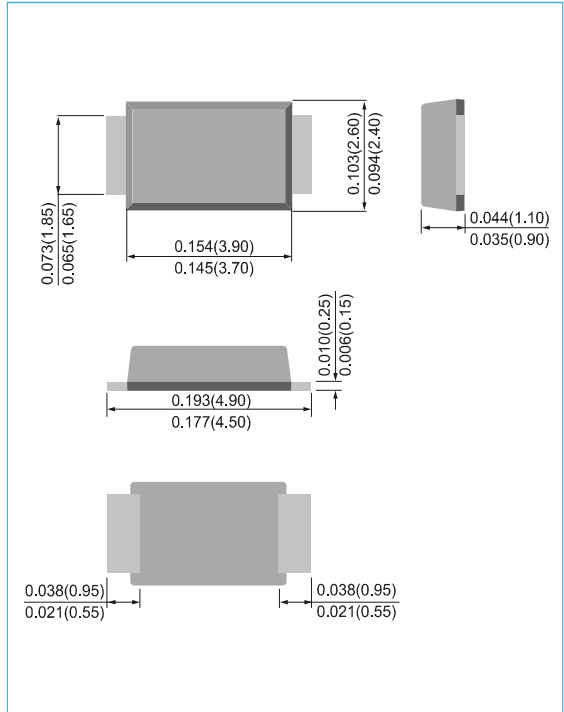

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise noted)


PARAMETER	SYMBOL	SX52F	SX53F	SX54F	SX54AF	SX56F	UNITS
Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	45	60	V
RMS Voltage	V <sub>RMS</sub>	14	21	28	31	42	V
DC Blocking Voltage	V <sub>R</sub>	20	30	40	45	60	V
Average Forward Current	I <sub>F(AV)</sub>	5					A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I <sub>FSM</sub>	100					A
Forward Voltage at 5A	V <sub>F</sub>	0.54				0.66	V
DC Reverse Current at Rated DC Blocking Voltage T <sub>J</sub> =25°C	I <sub>R</sub>	100			150	100	μA
DC Reverse Current at Rated DC Blocking Voltage T <sub>J</sub> =100°C	I <sub>R</sub>	30				20	mA
Typical Junction Capacitance V <sub>R</sub> =10V,1MHz	C <sub>J</sub>	159				125	pF
Typical Thermal Resistance (Note 1) (Note 2)	R <sub>θJA</sub> R <sub>θJL</sub>	150 15					°C/W
Operating Junction Temperature and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150					°C

NOTES:1.Mounted on a FR4 PCB, single-sided copper, mini pad.


2.Mounted on a FR4 PCB, single-sided copper, with 100cm<sup>2</sup> copper pad area




# SX52F~SX56F

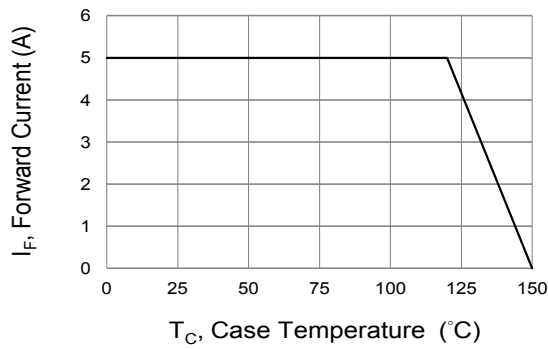


**Fig.1 Forward Current Derating Curve**

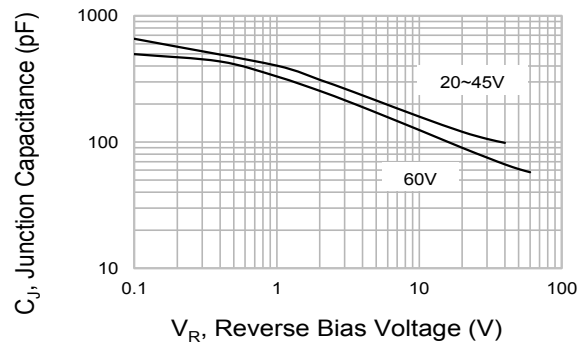


**Fig.2 Typical Junction Capacitance**

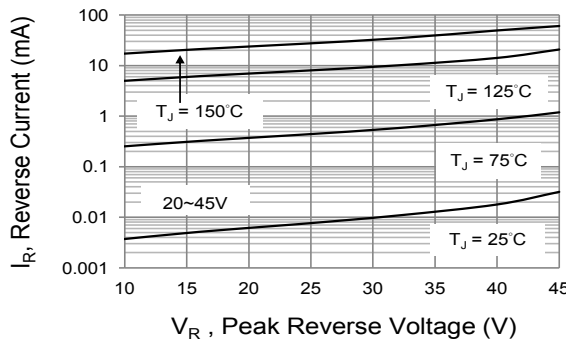


**Fig.3 Typical Reverse Characteristics**

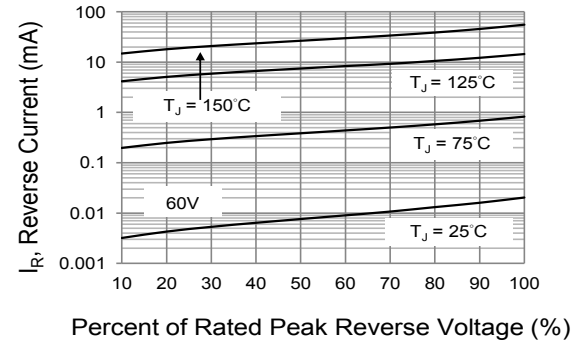


**Fig.4 Typical Reverse Characteristics**

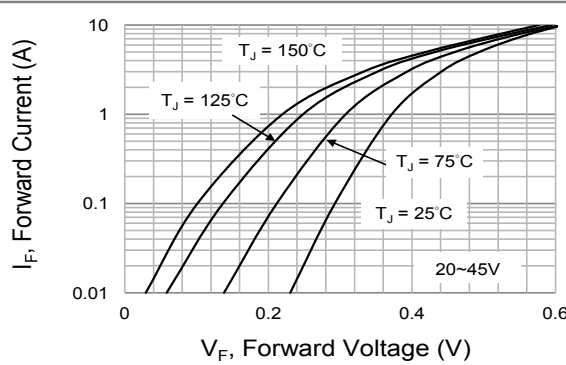

**Fig.5 Typical Forward Characteristics**

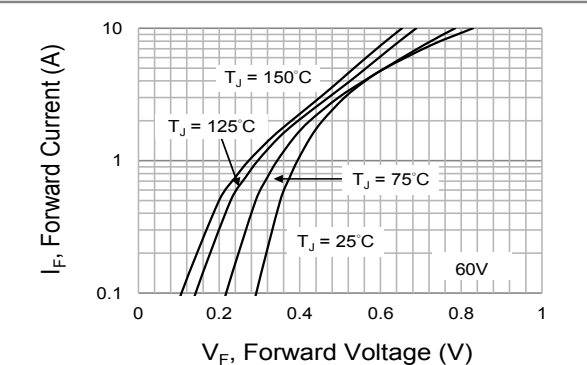

**Fig.6 Typical Forward Characteristics**

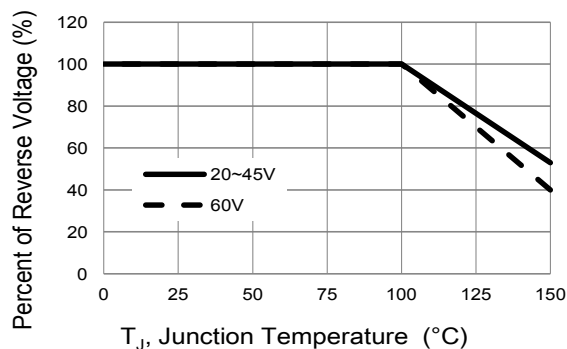


**Fig.7 Operating Temperature Derating Curve**



# SX52F~SX56F

## MOUNTING PAD LAYOUT

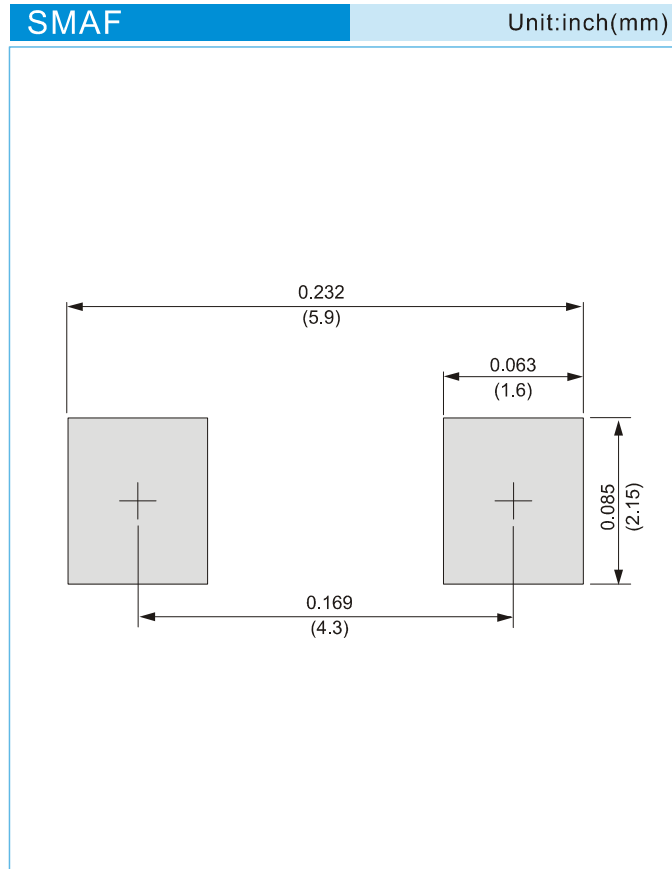

## ORDER INFORMATION

- Packing information  
T/R - 10K per 13" plastic Reel  
T/R - 3K per 7" plastic Reel



# SX52F~SX56F

## Part No\_packing code\_Version

SX52F\_R1\_00001

SX52F\_R2\_00001

For example :

**RB500V-40\_R2\_00001**



Packing Code <b>XX</b>				Version Code <b>XXXXX</b>		
Packing type	1 <sup>st</sup> Code	Packing size code	2 <sup>nd</sup> Code	HF or RoHS	1 <sup>st</sup> Code	2 <sup>nd</sup> ~5 <sup>th</sup> Code
Tape and Ammunition Box (T/B)	<b>A</b>	N/A	<b>0</b>	<b>HF</b>	<b>0</b>	serial number
Tape and Reel (T/R)	<b>R</b>	7"	<b>1</b>	<b>RoHS</b>	<b>1</b>	serial number
Bulk Packing (B/P)	<b>B</b>	13"	<b>2</b>			
Tube Packing (T/P)	<b>T</b>	26mm	<b>X</b>			
Tape and Reel (Right Oriented) (TRR)	<b>S</b>	52mm	<b>Y</b>			
Tape and Reel (Left Oriented) (TRL)	<b>L</b>	PANASERT T/B CATHODE UP (PBCU)	<b>U</b>			
FORMING	<b>F</b>	PANASERT T/B CATHODE DOWN (PBCD)	<b>D</b>			



## SX52F~SX56F

---

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.