

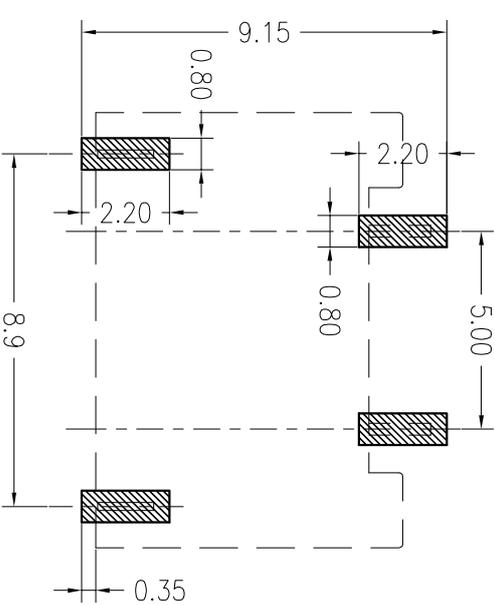
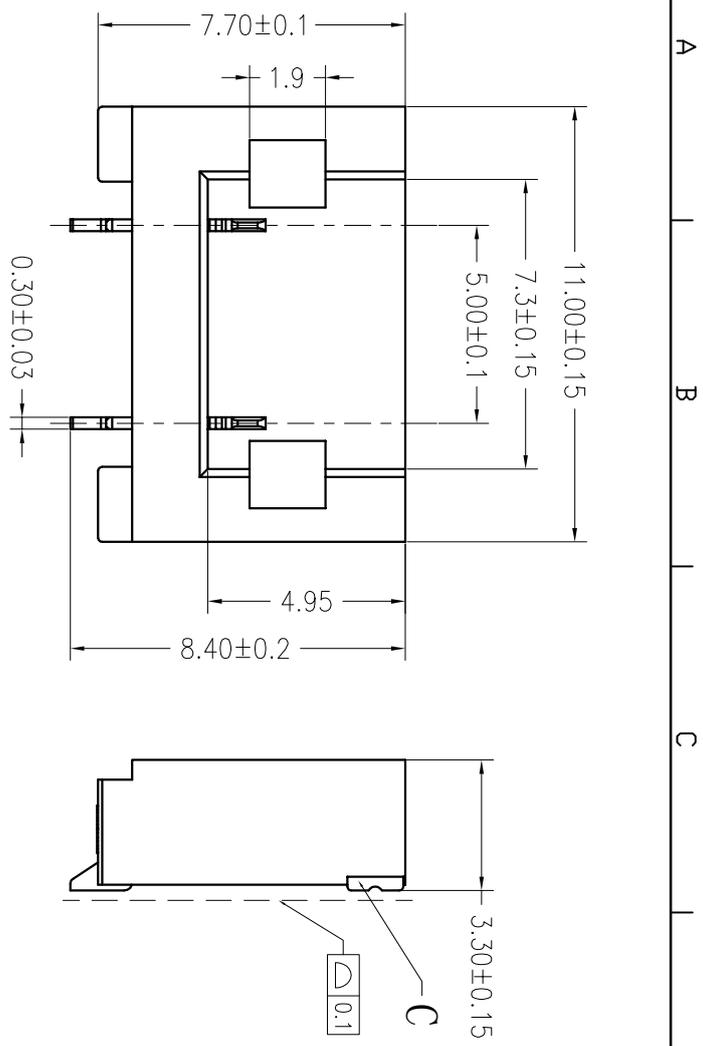


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	-	2018.08.15



Board Layout

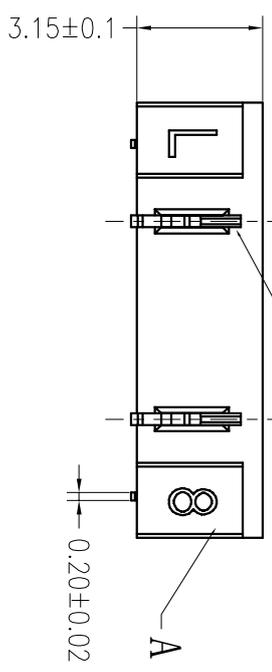

ORDER INFORMATION:

PART No. **A5001AWR-02-F4MB3-R** PACKAGING: **REEL**

Number of electrodes: **2** Metal code: **3=BRASS**

PLASTIC MATERIAL: **FAM=LCP(BERGE)** PLATING: **B=MATTE Sn**

主要技术参数 Main Specifications

- 线数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 2000V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ITEM	COMPONENT	QTY	MATERIAL	FINISH
C	SOLDER TAB	2 PCS	PhosphorBronze	MATTE SN
B	CONTACT	2 PCS	Brass	MATTE SN
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BERGE

JKUN 温州健坤连接器有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: -
 5.0mm PITCH 90° WAFER SMT TYPE

X \pm 0.5	X \pm 5°	USE:	CUSTOMER	PART NO.:	A5001AWR-02-F4MB3-R
X \pm 0.3	X \pm 2°	APPD:	邵敬和	DWG NO.:	JKUN-GCCP-0778
.XX \pm 0.25	.XX \pm 1°	CHKD:	田峰	SCALE	1 : 1
--	--	DR:	蒋建银	SHEET	1 / 1

A B C D E F

5 4 3 2 1