
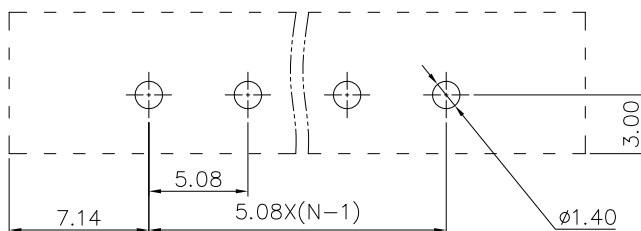
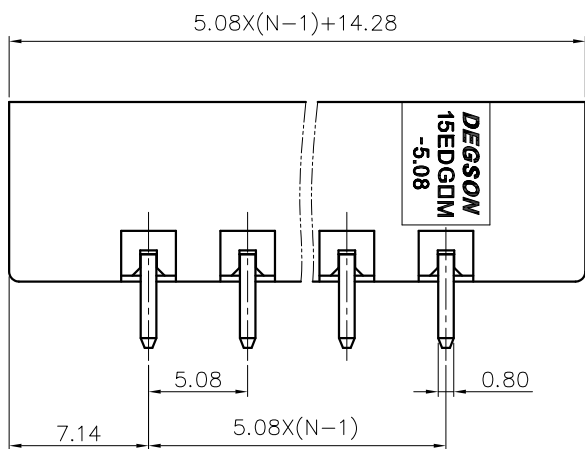
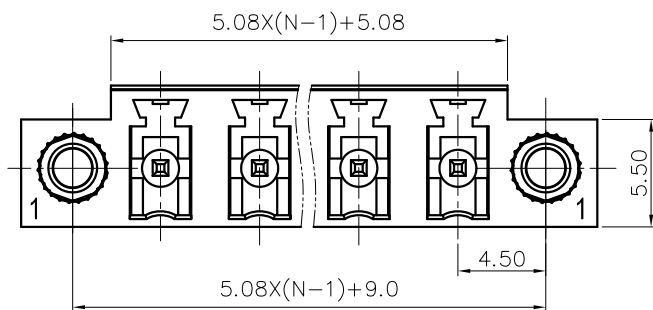


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

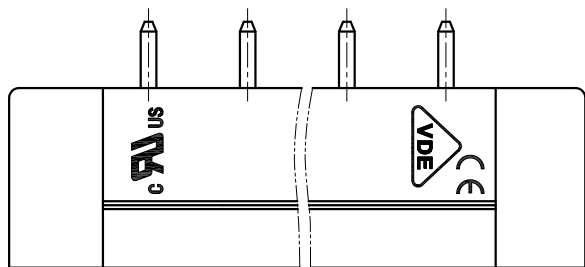

PCB LAYOUT

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 8A
2. Withstanding Voltage : AC1600V/1Min.

IEC Standard


1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.08mm, Poles : N=02~12P
3. Operating temperature: -40°C~+105°C
4. Undimensioned Tolerances:

Pitch	Range	In	Nominal	Dimension	Range	□	□
mm			In	mm		□	□
TO	Over	Over	TO	Over	Over	Over	Over
6	6	10	30	30	60	100	150
	TO	TO		TO	TO	TO	TO
	10	24		60	100	150	
				±0.15	±0.20	±0.30	±0.50
				±0.30	±0.50	±0.70	±1.00
				±1.00	±1.30	±2*	

5. RoHS Compliance

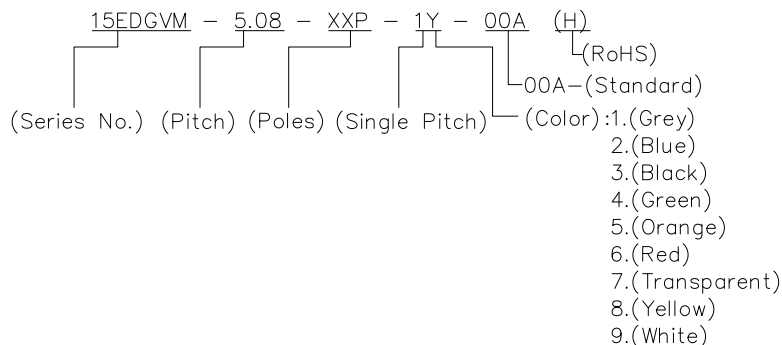

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 15EDGVM-5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET	1/1
		MM (INCH)	SCALE	1:1	