
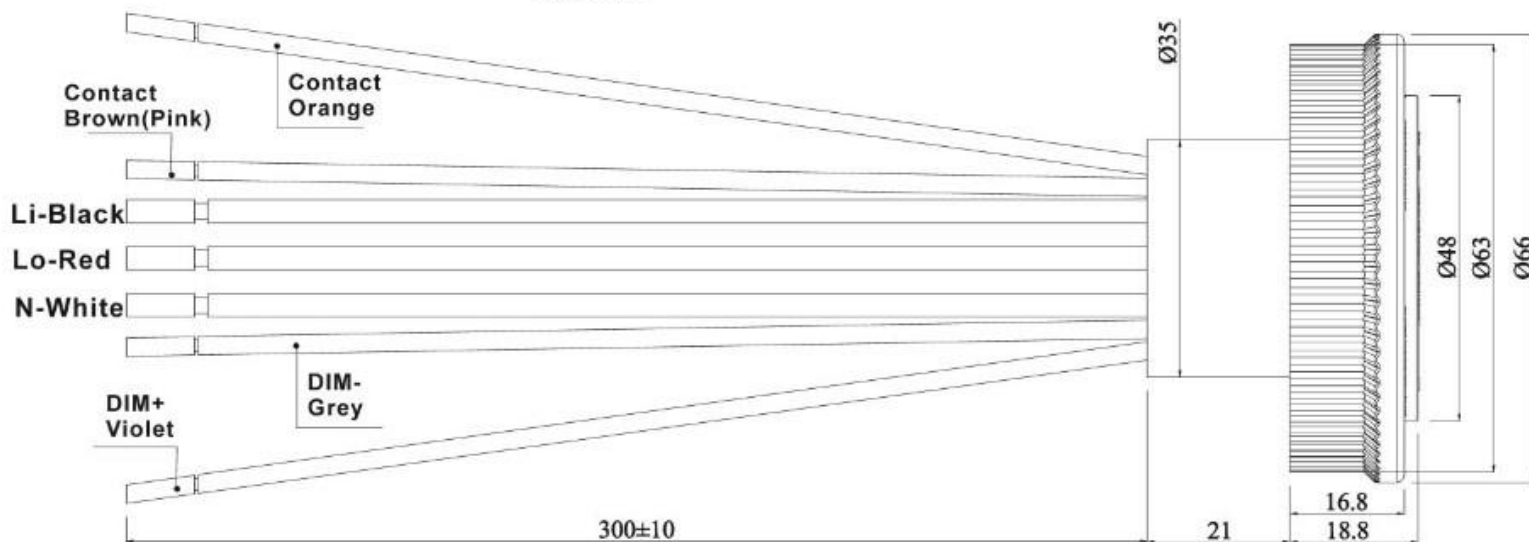
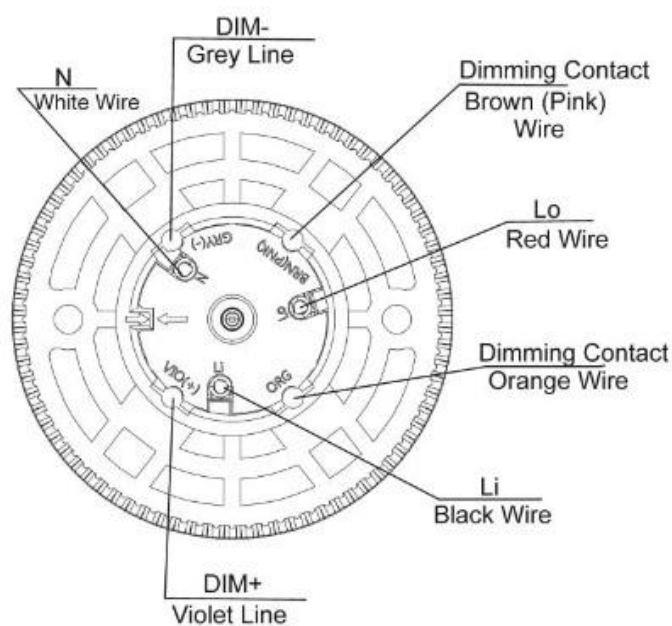


### Dimensions

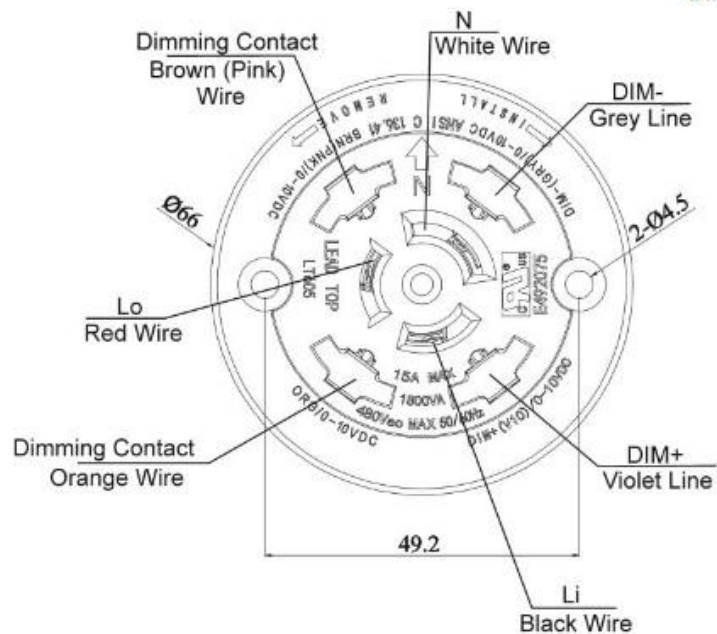

## **Product information**

Standard: ANSI C136.41 & UL773

Voltage Rating: Power Contacts : 480V

Dimming Contacts : 30V

Current Rating: Power Contacts : 15A

Dimming Contacts : 250mA

Relative Humidity: 99%

Insulation: 2500V/60Hz/1min

Housing: Bakelite

7 Position: 3 power contacts , 4 dimming/signal contacts

Cable: Power Line : UL1015 14AWG\*30cm

Signal Line : UL1015 18AWG\*30cm

Accessory: Silicon Gasket