


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

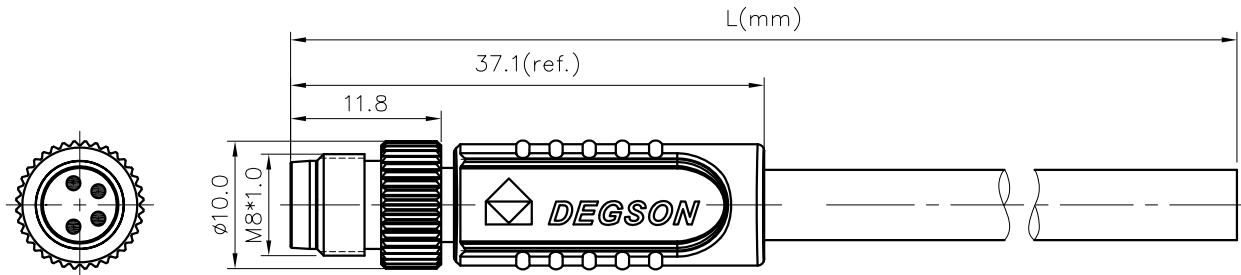

PM-M8X-XXP-MM-SL7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08

Cable jacket:
A: PVC UL2517;
B: PUR UL20549

Cable length
01: 1M
...
99: 99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A

- Withstanding voltage : AC800V/1Min
- Levels of protection: IP67
- Cable specifications :

- 3pin: 3C*24AWG/0.25mm²,UL2517/UL20549
- 4pin: 4C*24AWG/0.25mm²,UL2517/UL20549
- 5pin: 5C*24AWG/0.25mm²,UL2517/UL20549
- 6pin: 6C*26AWG/0.14mm²,UL2517/UL20549
- 8pin: 8C*26AWG/0.14mm²,UL2517/UL20549

- Wire connection mode: soldering
- Operating temperature: -40°C~+85°C
- RoHS Compliance

3pin A Coding	4pin A Coding	5pin B Coding	6pin A Coding	8pin A Coding
Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View	Pin Assignment Front View
				8 Red
				7 Blue
			6 Pink	6 Pink
		5 Gray	5 Gray	5 Gray
4 Black	4 Black	4 Black	4 Black	4 Yellow
3 Blue	3 Blue	3 Blue	3 Blue	3 Green
	2 White	2 White	2 White	2 Brown
1 Brown	1 Brown	1 Brown	1 Brown	1 White
Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color	Pin Wire Color
Pin Out	Pin Out	Pin Out	Pin Out	Pin Out

DETACHED LISTS	PART NO.: PMM8XXXPMMSL7XXX00AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PM-M8X-XXP-MM-SL7XXX-00A(H)		
	CHKD:	TITLE: CUSTOMER DRAWING		
	DRFT: LZ 2018.09.07	REV: D0-1	SHEET: 1/1	
		DRAWING NO.: XXXXXXXX-XX-CXX		SCALE: 1:1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		