

## connectors industrial circular Series

### KLS15-241-4M1 Connectors Industrial Circular Series



Safety approval : UL Water proof IP: 67  
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

#### Electrical Characteristics:

Rated current: 5A  
Rated Voltage: 250V  
Insulation resistance : 1500MΩ DC 500V  
Contact resistance: 10 mΩ DC 1A  
Operation Voltage: 200 VAC  
Withstanding Voltage : 1500 VAC  
Endurance: 500 cycles  
Temperature range: -45°C ~ +105°C


#### Material:

Material of housing: PA  
Contact plating: CuSnZn / Au

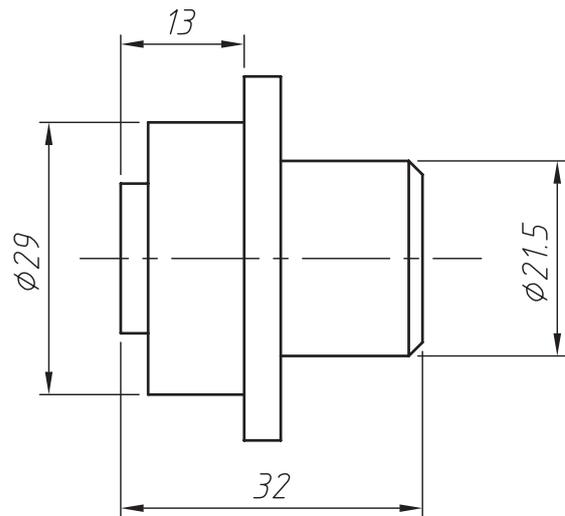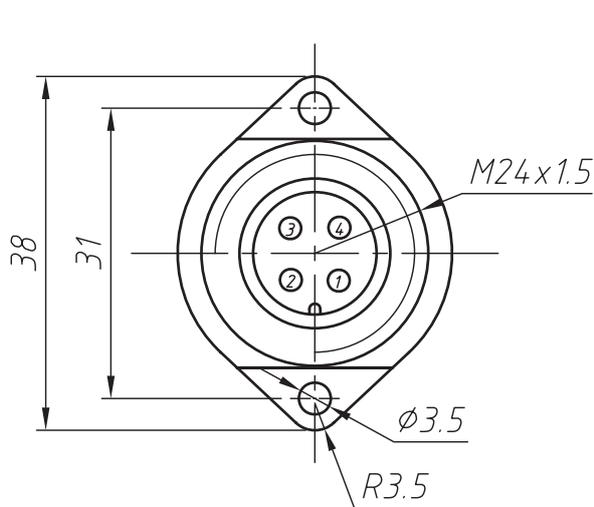

## ORDER INFORMATION

Product No.: **KLS15-241-4M1**

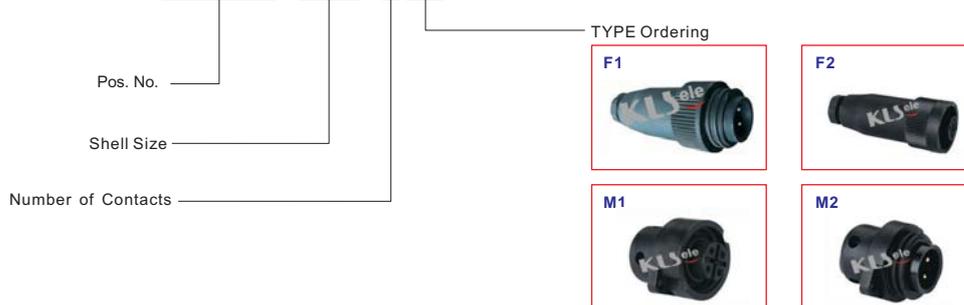

## connectors industrial circular Series

### KLS15-241-7M1 Connectors Industrial Circular Series


Safety approval : UL Water proof IP: 67  
Subminiature aviation linkers are widely used for the Hi-Tech trade. The appearances of the products has two kinds, plug-type and thread type. Used in the installation of the panel, small, exquisite and sensitive. It's nickel-plated and easy to plug-in.

#### Electrical Characteristics:

Rated current: 5A  
Rated Voltage: 250V  
Insulation resistance : 1500MΩ DC 500V  
Contact resistance: 10 mΩ DC 1A  
Operation Voltage: 200 VAC  
Withstanding Voltage : 1500 VAC  
Endurance: 500 cycles  
Temperature range: -45°C ~ +105°C

#### Material:

Material of housing: PA  
Contact plating: CuSnZn / Au

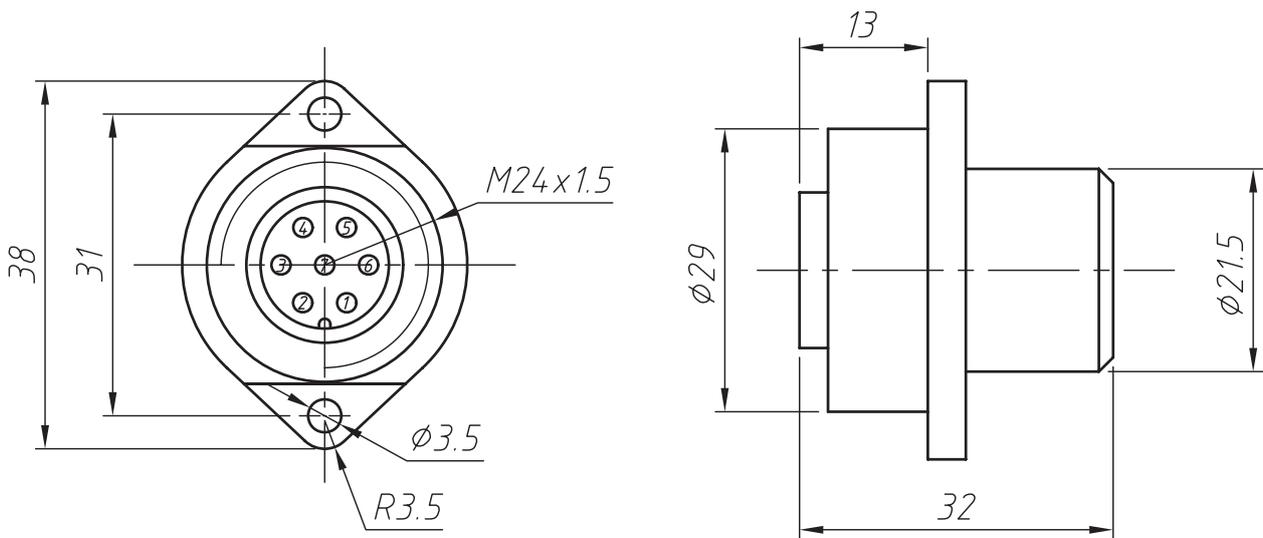

## ORDER INFORMATION

Product No.: **KLS15-241-7M1**

