
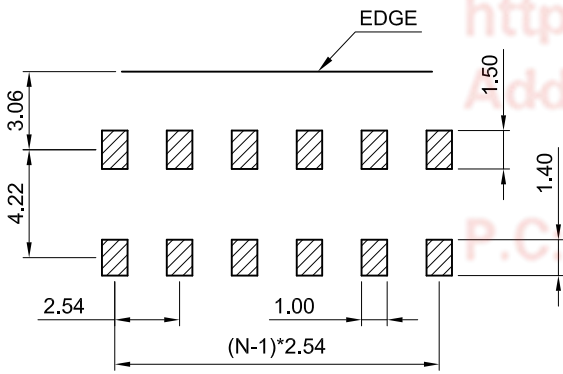
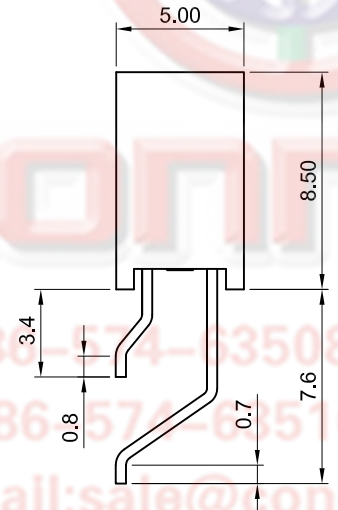
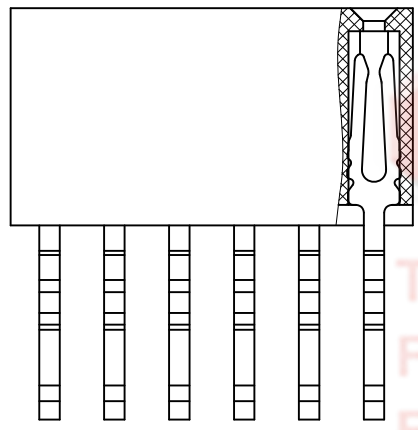


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/18/11'	~	LJC 10/18/11'
B	DRAWING UPDATE	JLZ 01/09/19'	HZW 01/09/19'	LJC 01/09/19'
C	P/N CODE UPDATE	JLZ 09/10/19'	~	

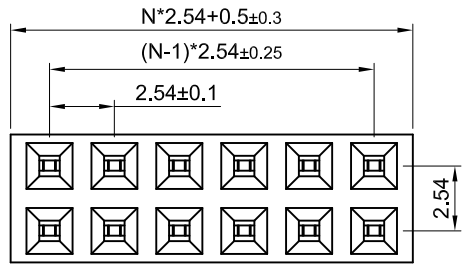

N=No.OF CONTACTS/2

Notes:

Specifications:

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating:3A.
5. Temperature: -40°C~+105°C.

Materials:

1. Contact Material: Copper Alloy.
2. Contact Plating: Gold Plating Over Nickel.
3. Insulator Materials: High Temp,Black,UL94-V0.

Product Number Code:

DS1023-24 - X X X X X X

- Packing type
T:tray
R:Tape on reel
- Profile height(DIM A)
1: 8.5mm
- Housing color
B: Black
- Contact plating
2: Nickel + gold flash
8: Full gold flash
- Mounting type
S: SMT type
- No.of contacts
2x2~2x40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-24-XXXXXX-C		

PROJECTION	TITLE	FEMALE HEADER PITCH	
		2.54mm SMT TYPE	
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1023-24 SERIES

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8