

SPECIFICATIONS

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max. B
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -55°C to +105°C

MATERIAL

Insulator: PBT+30% G.F., UL 94V-0
 Terminal: Copper Alloy

ORDER INFORMATION

5 7 D E D S X X - X X X X B A - X X

1: Tin shell + L(RoHS)
 2: Nickel shell + L(RoHS)

M: Male
 F: Female

No. of contacts

Boardlock	Mounting
NN	W/O ø3.05 Clear Hole
NA	W/O Thread Insert #4-40
NC	W/O Thread Insert #4-40+Jack Screw #4-40 Removable
ND	W/O Front Rivet #4-40, H=4.0
NQ	W/O Front Rivet #4-40, H=5.0
NS	W/O Rear Rivet #4-40, H=5.0
N3	W/O Rear Rivet #4-40, H=5.0+Screw
BA	With Thread Insert #4-40
CC	With Thread Insert #4-40+Jack Screw #4-40 Removable

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"


A: Tray

B: Black


With Boardlock	W/O Boardlock
01:H:3.6 I:11.1	01:H:3.6
02:H:5.4 I:12.7	02:H:5.4
03:H:7.2 I:14.5	03:H:7.2




⊙: Standard Recommend

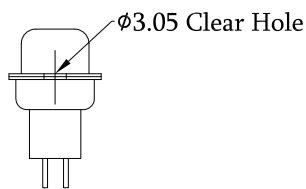



Ø3.05 Clear Hole




Front rivet #4-40, H=5.0




Front rivet #4-40, H=4.0

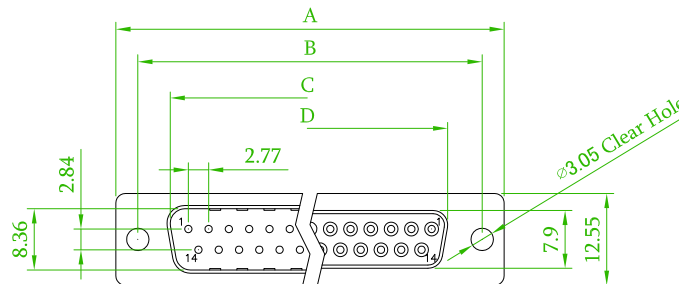

Rear rivet #4-40, H=5.0




Thread Insert #4-40

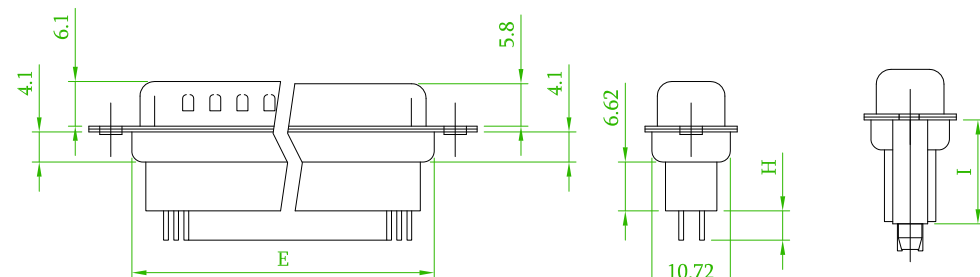


W/O Boardlock

With Boardlock



Thread Insert #4-40+
 Jack Screw #4-40 Removable



Rear rivet #4-40, H=5.0 + screw

Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
9	30.81	24.99	16.92	16.33	19.20
15	39.14	33.32	25.50	24.66	27.70
25	53.04	47.04	38.96	38.38	41.10
37	69.32	63.50	55.42	54.84	57.30

Dim. H	Dim. I
3.60	11.10
5.40	12.70
7.20	14.50

Old Part No.: DBE-XXX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C x2	Add an association of accessory: ND.	Gary	2018/09/17
B x6	ECN NO.: 180209, revise the order information, dimension, dielectric voltage.	Gary	2018/03/16

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE		D-SUB V/T DIP ELEVATED TYPE			
品號 PART NO.	57DEDSXX-XXXXXXBA-XX	繪圖 DRAWN	Jeff 2015/09/08		
圖號 DRAWING NO.	GW006-GB032	版本 REV.	C	核對 CHECKED	Josh 2018/09/17
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/09/17
公差 TOLERANCE	.X ±0.25 .XX ±0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	

