

ORDER INFORMATION




SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: PBT, UL94V-0, Black
 Contact Pin: Copper Alloy

5 P S 1 S D C 5 0 - 1 X X X X N N N X L - 0 0

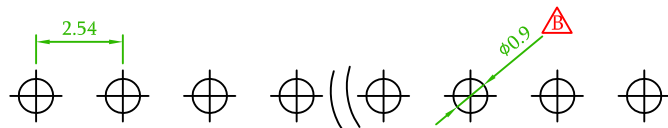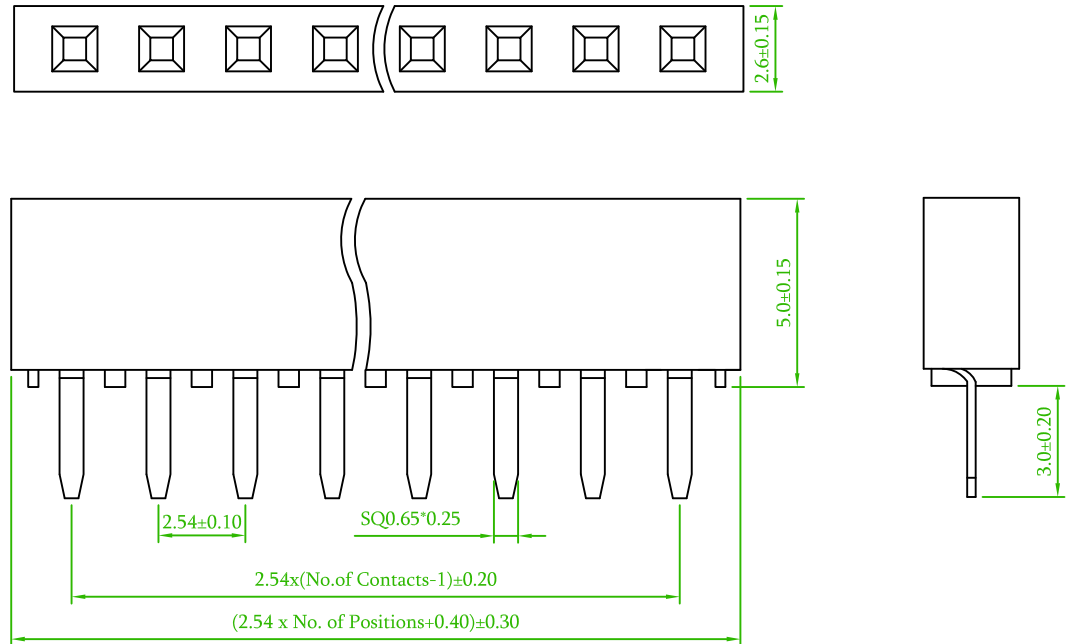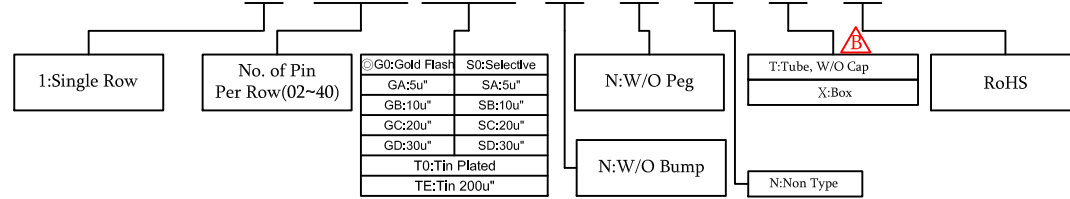

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PS1S50-1XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	ECN.NO.190705:Cancel package option(C.H.R),add package option(X:Box) Revise the DIM	Nick	2019/09/27

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm				頁數 Page	1/1
品號 PART NO.	5PS1SDC50-1XXXXNNNXL-00				繪圖 DRAWN	Mia 2017/02/02
圖號 DRAWING NO.	GN110-MC251		版本 REV.	B	核對 CHECKED	Jonny 2017/02/02
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/02/02
公差 TOLERANCE	.X ± 0.38	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	