
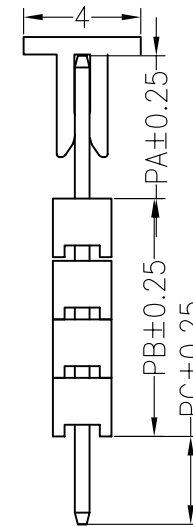
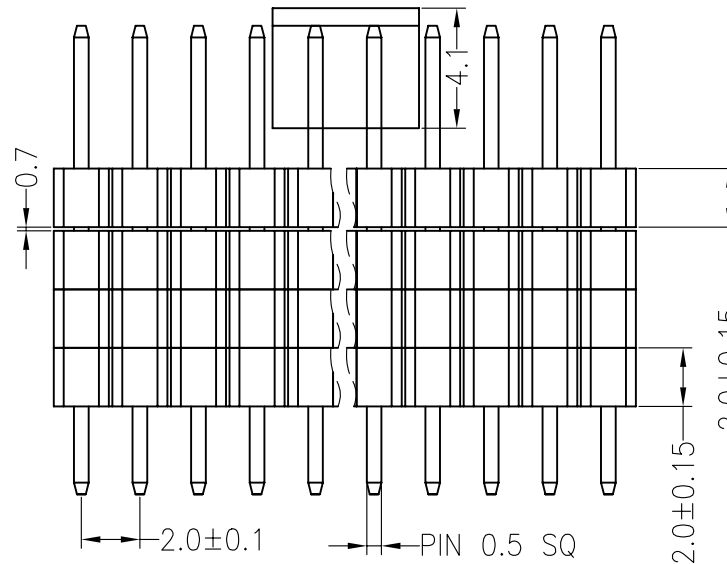
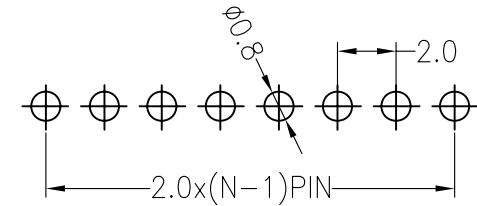


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

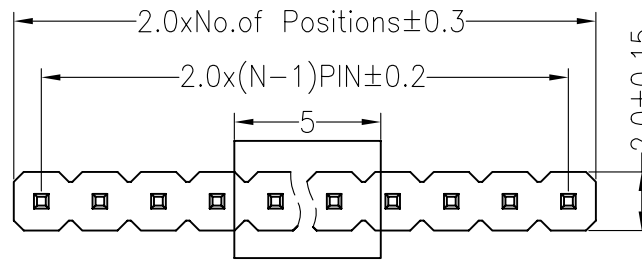

Dimension antitheses list				
ITEM	PA	PB	PC	L
Alternate	4.00	8.70	3.00	15.70

				OPERATION		DRAW	BEN	12.04.11	SCALE	FIT	NINGBO KLS ELECTRONIC CO.,LTD	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK	SIZE	A4	PART NO.	L-KLS1-207B-8.0-1-12-S-3.0*4.0*15.7		
A0	2012.04.11	NEW DRAWING		X.XXX	±0.10		SHEET	1/1	TITLE:	2.0PH 1xNpin 4XH2.0mm Single 180°		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	APPROVE		PROJ.				
					±3°							
					DIM	TOL						