
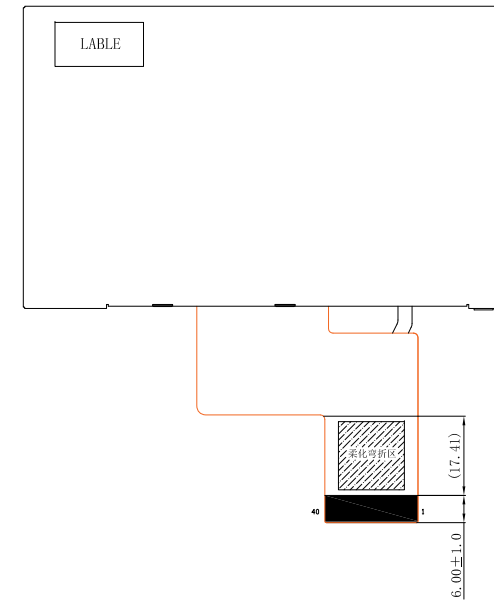
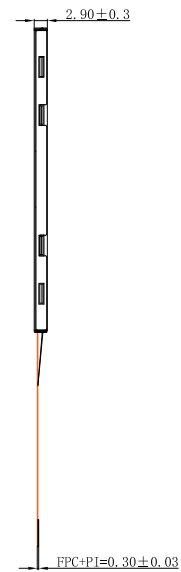


| REV. | CHANGE CONTENT | BY | DATE |
|------|----------------|--------|----------|
| A | FIRST | Mr.Han | 19.11.29 |

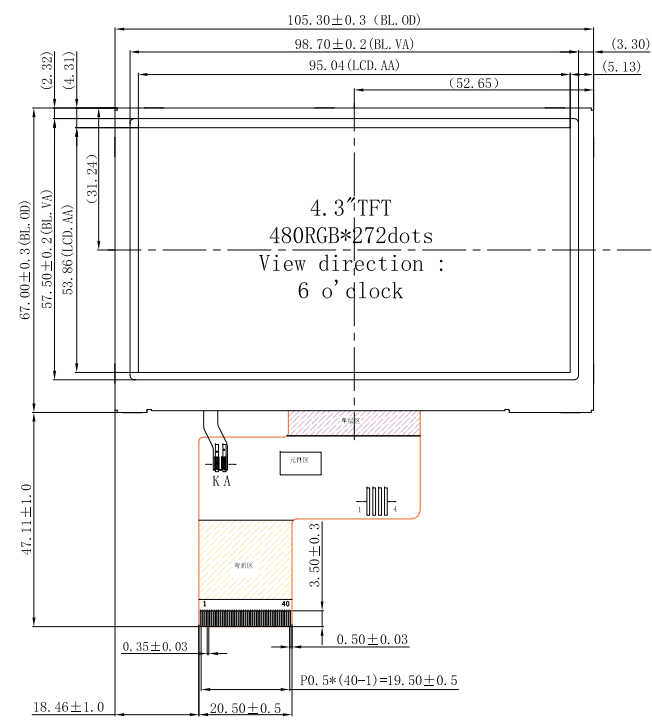


| PIN | NAME |
|-----|---------|
| 1 | K |
| 2 | A |
| 3 | GND |
| 4 | DVDD |
| 5 | R0 |
| 6 | R1 |
| 7 | R2 |
| 8 | R3 |
| 9 | R4 |
| 10 | R5 |
| 11 | R6 |
| 12 | R7 |
| 13 | G0 |
| 14 | G1 |
| 15 | G2 |
| 16 | G3 |
| 17 | G4 |
| 18 | G5 |
| 19 | G6 |
| 20 | G7 |
| 21 | B0 |
| 22 | B1 |
| 23 | B2 |
| 24 | B3 |
| 25 | B4 |
| 26 | B5 |
| 27 | B6 |
| 28 | B7 |
| 29 | GND |
| 30 | DCLK |
| 31 | DISP |
| 32 | HS |
| 33 | VS |
| 34 | DE |
| 35 | NC |
| 36 | GND |
| 37 | XR (NC) |
| 38 | YD (NC) |
| 39 | XL (NC) |
| 40 | YU (NC) |

NOTES:

1. Display Type: 4.3" TFT
2. Display Mode: TN NORMALLY WHILE
3. Viewing Direction: 6 o'clock
4. Operation Temperature: -20°C to +70°C
Storage Temperature: -30°C to +80°C
5. VCI:3.3V
6. Luminance: 800cd/m²(Min) 850cd/m²(Typ)
7. Driver IC: ST7282
8. Unmarked Tolerance: ≤20mm,±0.05mm
≥20mm,±0.2mm
9. ROHS Compliant

CIRCUIT DIAGRAM



BACKLIGHT: 12 CHIP-WHITE LED
IF=40mA VF=16.8~20.8V

| | | | | |
|--------------|---------|------------|---------------------------|------------|
| | | | DRAWING No. : HT0430CT07A | |
| | | | DRAWING TITLE: OUTLINE | |
| FILE NO. : 1 | | | REV. : A | |
| DESIGN | Han Kai | 2019.11.29 | PROJECTION: | SCALE: 1:1 |
| CHECKED | WS | 2019.11.29 | | UNIT: mm |
| APPROVED | ZXY | 2019.11.29 | | SHEET: 1/1 |