

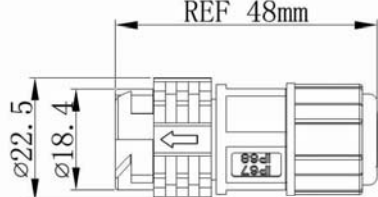
















M19 自锁组装款 M19 Push Locking Field Assembly

描述 Description	插针公插头 Pin Male connector	插孔母插头 Pole Female connector
照片 Figure		

尺寸 Drawing		
---------------	---	---

料号 Part No.	芯数 Contacts	料号 Part No.	芯数 Contacts	料号 Part No.
	2		2	
	3		3	
	4		4	
	5 (3+2)		5 (3+2)	
	6 (3+3)		6 (3+3)	
	7 (3+4)		7 (3+4)	
	8 (3+5)		8 (3+5)	
	9		9	
	10		10	
	12		12	
	14		14	
	16		16	
18		18		
22(2+20)		22(2+20)		

芯数 Number of contacts														
额定电流/电压 Current/Voltage rating	20A 300V		15A 300V	15A+5A 300V+60V				5A 60V				15A+5A 300V+60V		
接触件直径 Contact diameter X number	φ2.4		φ2.0	φ2.0+φ0.8				φ1.0				φ2.0+φ0.8		
耐电压 Withstanding voltage	1500V		1000V	1000V				500V				500V		
防护等级 Protection level	IP67													
线材规格 Cable Gauge	1.5mm ² -2.5mm ² (16-12AWG)			0.5mm ² -1.5mm ² (20-16AWG)				0.3-0.5mm ² (24+20AWG)						
线径范围 Diameter range	φ4.5-φ11													
工作温度 Operating temperature	-40℃ ~ 105℃													
连接方式 Connecting mode	自锁式 Push Locking													
外壳、绝缘部件 Shell, insulating parts	高性能工程塑料 High-performance engineering plastics													
铜针 Material of copper needles	铜合金 Copper alloy													
阻燃等级 Flame-resistant rating	UL94-V0													