

NO.: JSB200228002

TO: Ozdisan

APPROVAL SHEET No. : B-7751A

Series No.: KL4

Specification No.:

RoHS

**APPROVAL SHEET
FOR AL. ELECTROLYTIC CAPACITORS**

No.	(Customer No.)	(Koshin Part No.)	Description	ΦD x L
1		PKL4-400V331MO350	400V330UF	30X35

APPROVED BY:

PLEASE SIGN RETURN US ONE COPY OF THE APPROUAL SHEET

DESIGNED BY: LUOLI

CHECKEDBY: CAOGUIHUA

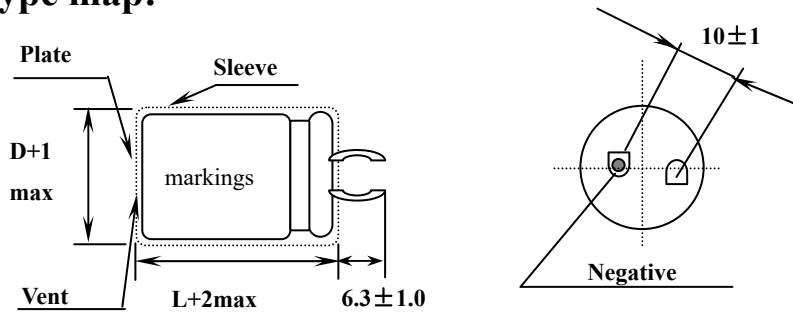
APPROVED BY: SHENZHIHONG

DATE: 2020-2-28

KOSHIN

DJS-DS-0013

Snap-in type map:



Unit: mm

Coefficient of Frequency for Ripple Current

Frequency (Hz)	50•60	120	1K	10K	50K-100k
Capacitance(μF)					
$CAP \leq 100$	0.80	1.00	1.36	1.48	1.53
$100 < CAP \leq 1000$	0.80	1.00	1.25	1.35	1.38
$1000 < CAP$	0.80	1.00	1.17	1.25	1.28

Coefficient of Temperature for Ripple Current

Temperature (°C)	45	60	70	85
Coefficient	1.55	1.30	1.20	1.00



Series KL4 Capacitor

1. Our part No. :

For example :

<u>PKL4</u>	<u>400 V</u>	<u>331</u>	<u>M</u>	<u>O350</u>
Series code	rated voltage	capacitance	tolerance	case size symbol
PKL4	400V	330 μ F	$\pm 20\%$	$\Phi 30 \times 35$

2. Your part No.:

3. Marking:

Include company's brand "Koshin", series code, rated voltage, capacitance, rated temperature range, polarity and tolerance of capacitance.

4. Specifications:

4.1 Temperature range : -25~ +85°C

4.2 Electrical characteristics

4.2.1 Capacitance tolerance : $\pm 20\%$

4.2.2 Tangent of loss angle ($\tan \delta$) :

Rated Voltage (V)	10	16	25-35	50, 63	80, 100	160-500
$\tan \delta(\max)$	0.45	0.35	0.30	0.25	0.20	0.15

4.2.3 Leakage current (μ A) :

Rated voltage (V)	10 ~ 500
Leakage Current (μ A)	Less than 0.02CV or 3 mA whichever is smaller (after 5 minutes)

Note: I : Leakage current (μ A) , C : Capacitance (μ F) , V : Rated DC working voltage (V)

NO	ITEM	TEST METHOD	SPECIFICATION
2.6	Surge test	Rated surge voltage shall be applied (switch on)for 30±5 second and then shall be applied (switch off) with discharge for 5.5min at room temperature. This cycle shall be repeated for 1000 cycles. Duration of one cycle is 6±0.5 minutes	<p>Capacitance change: within±15% of the initial specified value.</p> <p>Dissipation factor: Less than specified value.</p> <p>Leakage current: Within initial specified value.</p>

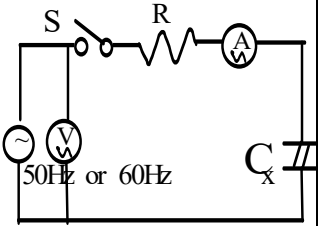
3.Mechanical characteristics :

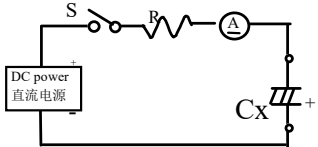
NO	ITEM	TEST METHOD	SPECIFICATION										
3.1	Lead strength	<p>(A)Tensile strength: snap-in terminal:</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 10px;"> <tr> <td style="width: 30%;">d(mm)</td> <td>snap-in terminal</td> </tr> <tr> <td>load(kg)</td> <td style="text-align: center;">2.0</td> </tr> </table> <p>The capacitor shall withstand the constant tensile force specified between the body and each lead for 10seconds without damage either mechanical or electrical.</p> <p>(B) Bending strength: snap-in terminal:</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 10px;"> <tr> <td style="width: 50%;">cross section area of terminal</td> <td style="width: 50%;">force</td> </tr> <tr> <td style="text-align: center;">$0.5 < S \leq 1$</td> <td style="text-align: center;">1.0</td> </tr> <tr> <td style="text-align: center;">$S > 1$</td> <td style="text-align: center;">2.5</td> </tr> </table> <p>with the capacitor in a vertical position apply the load specified axially to each lead. The capacitor shall be rotated slowly from the vertical to the horizontal position, back to the vertical position. The 90° in the opposite direction and back the original position. Performance of capacitor shall not have change and leads shall be undamaged.</p>	d(mm)	snap-in terminal	load(kg)	2.0	cross section area of terminal	force	$0.5 < S \leq 1$	1.0	$S > 1$	2.5	<p>When the capacitance is measured, there shall be no intermittent contacts, or open-or short-circuiting.</p> <p>There shall be no such mechanical damage as terminal damage etc.</p>
d(mm)	snap-in terminal												
load(kg)	2.0												
cross section area of terminal	force												
$0.5 < S \leq 1$	1.0												
$S > 1$	2.5												

NO.	ITEM	TEST METHOD	SPECIFICATION
3.2	Vibration resistance	<p>The frequency of the vibration shall vary uniformly within the range 10 to 55 Hz with the amplitude of 0.75mm, completing the cycle in the interval of one minute.</p> <p>The capacitor shall be securely mounted by its leads with hold the body of capacitor.</p> <p>The capacitor shall be vibrated in three mutually perpendicular directions for a period of 2 hours in each direction.</p>	<p>Appearance : no abnormal.</p> <p>Capacitance change: within $\pm 5\%$ of initial measured value.</p>
3.3	Solder ability	<p>The leads are dipped in the solder bath of Sn at $245^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 2 ± 0.5 seconds. The dipping depth should be set at 1.5~2.0 mm.</p>	<p>The solder alloy shall cover the 95% or more of dipped lead's area.</p>

4. Reliability :

NO.	ITEM	TEST METHOD	SPECIFICATION
4.1	Soldering heat resistance	<p>The leads immerse in the solder bath of Sn at $260^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 10 ± 1 seconds until a distance of 1.5~2.0mm from the case.</p>	<p>No visible damage or leakage of electrolyte.</p> <p>Capacitance change: Within $\pm 5\%$ of the initial measured value</p> <p>Tan δ: Less than specified value.</p> <p>Leakage current: Less than specified value</p>
4.2	Damp head (steady state)	<p>Subject the capacitor to $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ and 90% to 95% relative humidity for 504 hours.</p>	<p>Capacitance change: Within $\pm 20\%$ of the initial measured value</p> <p>Tan δ : Less than 1.2 specified value.</p> <p>Leakage current: Less than specified value</p> <p>Impedance: Less than 1.2 specified value.</p>

NO.	ITEM	TEST METHOD	SPECIFICATION														
4.3	Load life	After 3000 hours continuous application of max allowable ripple current and DC rated voltage at $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Measurements shall be performed after 16 hours exposed at room temperature.	Capacitance change: Within $\pm 20\%$ of the initial value. Tan δ :less than 200% specified value Leakage current: Less than initial specified value. Appearance :no Abnormal														
4.4	Shelf life	After storage for 1000 hours at $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$ without voltage application ,Measurements shall be performed after exposed for 16 hrs at room temperature after application of Testing															
4.5	Storage at low temperature	The capacitor shall be stored at temperature of $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 16 hours, during which time be subjected to standard atmospheric conditions for 16 hours or more. After which measurements shall be made.	Capacitance change: Within $\pm 10\%$ of the initial value. Tan δ :less than specified value Leakage current: Less than specified value. Appearance :no Abnormal.														
4.6	Pressure relief	AC test Applied voltage: AC voltage not exceeding 0.7 times of the rated direct voltage or 250V AC whichever is the lower. Frequency : 50Hz or 60Hz. Series resistor :refer to the table below s* Resistance is equivalent to a half impedance by test frequency. <table border="1" style="margin: 10px auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Capacitance(C) 容量</th> <th>Series resistor</th> </tr> </thead> <tbody> <tr> <td>$C < 1\mu\text{F}$</td> <td>1000 Ω</td> </tr> <tr> <td>$1\mu\text{F} < C \leq 10\mu\text{F}$</td> <td>100 Ω</td> </tr> <tr> <td>$10\mu\text{F} < C \leq 100\mu\text{F}$</td> <td>10 Ω</td> </tr> <tr> <td>$100\mu\text{F} < C \leq 1000\mu\text{F}$</td> <td>1 Ω</td> </tr> <tr> <td>$1000\mu\text{F} < C \leq 10000\mu\text{F}$</td> <td>0.1 Ω</td> </tr> <tr> <td>$10000\mu\text{F} < C$</td> <td>*</td> </tr> </tbody> </table>	Capacitance(C) 容量	Series resistor	$C < 1\mu\text{F}$	1000 Ω	$1\mu\text{F} < C \leq 10\mu\text{F}$	100 Ω	$10\mu\text{F} < C \leq 100\mu\text{F}$	10 Ω	$100\mu\text{F} < C \leq 1000\mu\text{F}$	1 Ω	$1000\mu\text{F} < C \leq 10000\mu\text{F}$	0.1 Ω	$10000\mu\text{F} < C$	*	AC test circuit  Ⓢ : AC power S : Switch Ⓢ : AC voltage meter Ⓢ : AC current meter R : protection resistor C _x : testing capacitor
Capacitance(C) 容量	Series resistor																
$C < 1\mu\text{F}$	1000 Ω																
$1\mu\text{F} < C \leq 10\mu\text{F}$	100 Ω																
$10\mu\text{F} < C \leq 100\mu\text{F}$	10 Ω																
$100\mu\text{F} < C \leq 1000\mu\text{F}$	1 Ω																
$1000\mu\text{F} < C \leq 10000\mu\text{F}$	0.1 Ω																
$10000\mu\text{F} < C$	*																

NO.	ITEM	TEST METHOD	SPECIFICATION
4.7	Pressure relief	<p>DC test Send the following electricity while applying the inverse voltage.</p> <p>Where case size $D \leq 22.4\text{mm}$: 1 A D.C.fixed $D > 22.4\text{mm}$: 10 A D.C.fixed</p> <p>Note 1. When the pressure relief device does not open even 30 minutes after commencement of test, the test may be ended.</p>	<p>DC test circuit</p>  <p>S : Switch Ⓐ : DC current meter Cx: testing capacitor</p> <p>The pressure relief device shall open in such a way as to avoid any damage of fire or explosion of capacitor elements (terminal and metal foil etc.) or cover.</p>
4.8	Temp cycle	<p>LSL temperature(°C): -25 ± 3 time(H): 0.5H/timeX5 times USL temperature(°C): 85 ± 2 time(H): 0.5H/timeX5 times Judgment: CAP: $\Delta C/C \leq \pm 10\%$, Appearance no Abnormal. No electrolyte leakage.</p>	
4.9	Thermal shock	<p>dry heat temperature (°C): 85 ± 2 time(H): 16 moist heat temperature(°C): 55 time(H): 24/ cold temperature(°C): -25 ± 2 time(H): 2/ moist heat temperature(°C): 55 time(H): 24 : Judgment: CAP, $\Delta C/C \leq \pm 10\%$, Tan δ :Less than 1.2 specified value, Leakage current: Less than specified value. Appearance no Abnormal. No electrolyte leakage.</p>	

5. Marking

Marking on capacitors include:

Koshin trade-mark
Koshin

Working voltage

Normal capacitance

Tolerance

Polarity

Operating temperature range

Sleeving pipe basic: Black PET

Printing color: White

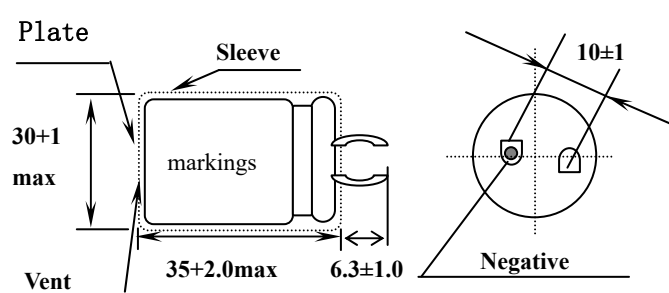


Detergent needing attention

Hydrogen carbide liquid and halogen liquid can cause Aluminum Electrolytic Capacitor to corrode. Some of Safe and Unsafe detergent are as follows

Safe	Unsafe
Dimethylbenzene	1,1,2-trichloroethane
Ethanol	1,2,2- trichloroethane
Butanol	Tetrachloroethylene
Methanol	Chloroform(colorless volatilizable liquid)
Propanol	Dichloromethane
Detergent	Trichloroethylene

Aluminum Electrolytic Capacitor Specification

Series	PKL4	400 V 330 μ F	Part No.	PKL4-400V331M0350
Issue No.	/		Case size	Φ D30 X L 35
Specification	Items		Standard	
	Operating temperature range		-25 ~ + 85 $^{\circ}$ C	
	Capacitance tolerance		\pm 20% (20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.15 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 2640 μ A (20 $^{\circ}$ C 400 V 5 min)	
	Ripple current (MAX)		2050 mArms (120Hz , 85 $^{\circ}$ C)	
	Load life		3000 hrs	
Outline	Sleeving pipe basic		PET	
	(Dimensions)			
	 <p>The drawing shows a side view and a top view of the capacitor. The side view labels include 'Plate', 'Sleeve', 'markings', 'Vent', and dimensions: height is 30 ± 1 max, length is 35 ± 2.0 max, and sleeve length is 6.3 ± 1.0. The top view shows a circular capacitor with a diameter dimension of 10 ± 1 and a 'Negative' terminal marked with a minus sign.</p>			
Unit: mm				
Recorder	(The first edition) :2020-2-28			
Wrote by: Luoli		Checked by: Caoguihua		Approved by: Shenzhihong