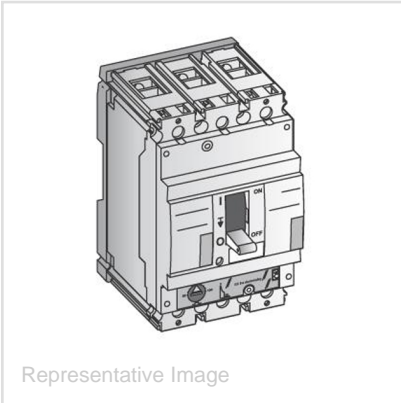


**Ref. No. 433604 | Cat. No. FDS46TD160GD**
**Description: FDS 160 Breaker Icu 36 kA/415VAC Ue 690VAC 4P 4trips - 160A LTMD**
**EAN 5050096336045**
**Home > Industrial Circuit Breakers > Moulded Case Circuit Breakers**

Rated at 160A, the FD160 frame size is designed for use in both a DIN-rail environment with modular equipment and in industrial applications. It is supplied with IPXXB terminals suitable for direct connection of one or two conductors totalling up to 95 mm<sup>2</sup> and is available as a thermal-magnetic breaker(LT,ST). The FD160 bridges the gap between residential miniature circuit breakers and industrial moulded case circuit breakers.


**Descriptors**

Category	Moulded Case Circuit Breakers
----------	-------------------------------

**Specifications**

Series	Circuit breaker (complete breaker)
In (A)	160 A
Number of poles	4P
Trips	4 trips
Frame type	D frame (63A/160A)
Rating frame (A)	160 A
Short-circuit capacity (kA)	Residential 36 kA
Trip Unit	Line protection (thermal) delayed
Measurements	130x108x85 mm
Ui (V)	750 V
Ir (A)	128-160 A
IEC 230VAC	50 kA
IEC 400VAC	36 kA
IEC 440VAC	25 kA
IEC 500VAC	18 kA
IEC 690VAC	6 kA
IEC 690VAC Icu	6 kA
IEC 690VAC Ics	3 kA
IEC 250VDC	25 kA
IEC 440VDC	25 kA
IEC 500VDC	25 kA
NEMA 240V	50 kA
NEMA 480V	25 kA
Im (A)	1250 A

**Classifications**

ETIM 5.0	EC000228 - Power circuit-breaker for trafo/generator/installation protection
----------	--

## Classifications

ETIM 6.0	EC000228 - Power circuit-breaker for trafo/generator/installation protection
ETIM 7.0	EC000228 - Power circuit-breaker for trafo/generator/installation protection

## Dimensions

Weight	1.300 kg
--------	----------

## Package Information

Standard packing	1
------------------	---