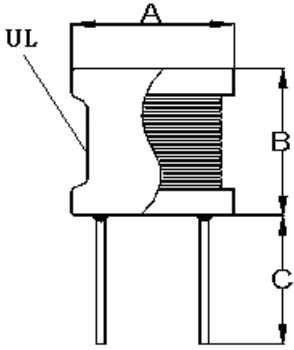



SPECIFICATION FOR APPROVAL

CUSTOMER:		DATE:	
PART NO: RC0810U-330M		DWG.NO: HX4002145	
CUSTOMER PART NO:		CUST.DWG.NO:	
(1) DIMENSION(UNIT: mm) 		A	10 (MAX) m/m
		B	12 (MAX) m/m
		C	15.0 ± 2.0 m/m
		D	m/m
		E	m/m
		F	m/m
		G	m/m
		H	m/m
		I	m/m
		J	m/m
		(2)ELECTRICAL REQUIREMENTS	
L (uH)	33 ± 20%		
RDC (Ω)	0.2 (MAX)		
IDC (A)	3 (MAX)		
TEST CONDITION	1KHz / 0.25V		
		APPROVED BY 吳載敏	
		CHECKED BY 張明德	
		DRAWN BY 黃慧診	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER:				DATE:				
PART NO: RC0810U-330M				DWG.NO: HX4002145				
CUSTOMER PART NO :				CUST.DWG.NO :				
TEST CONDITION: 1KHz / 0.25V				DIMENSION (UNIT : mm)				
ITEM	L (uH)	RDC (Ω)	IDC (A)	A	B	C		
SPEC	33 ± 20%	0.2 (MAX)	3 (MAX)	10 (MAX)	12 (MAX)	15.0 ± 2.0		
1	19.93	0.040	OK	9.39	10.52	14.45		
2	20.10	0.039	OK	9.45	10.66	14.37		
3	19.64	0.039	OK	9.17	10.65	14.26		
4	19.99	0.041	OK	9.50	10.75	14.20		
5	20.44	0.041	OK	9.56	10.71	14.78		
6	20.04	0.037	OK	9.39	10.67	14.59		
7	20.01	0.041	OK	9.47	10.67	14.49		
8	20.01	0.039	OK	9.50	10.41	14.71		
9	19.95	0.038	OK	9.49	10.69	14.24		
10	19.99	0.040	OK	9.47	10.67	14.49		
X	20.01	0.04		9.439	10.64	14.458		
R	0.8	0.004		0.39	0.34	0.58		
TEST INSTRUMENTS HM2791 METER FOR L						APPROVED BY 吳載敏		
						CHECKED BY 張明德		
						DRAWN BY 黃慧診		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw