



PJA45N02

20V N-CHANNEL ENHANCEMENT MODE MOSFET

VOLTAGE 20 Volt **CURRENT** 3.6 Ampere

SOT-23



Unit : inch(mm)

FEATURES

- $R_{DS(ON)}$, V_{GS} @1.8V, I_D @1.5A<87mΩ
- $R_{DS(ON)}$, V_{GS} @4.5V, I_D @3.6A<40mΩ
- Advanced Trench Process Technology
- High Density Cell Design For Ultra Low On-Resistance
- Specially Designed for DC/DC Converters
- Low Gate Charge
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- Case: SOT-23 Package
- Terminals : Solderable per MIL-STD-750,Method 2026
- Apporx. Weight : 0.0003 ounces, 0.0084grams
- Marking : 45

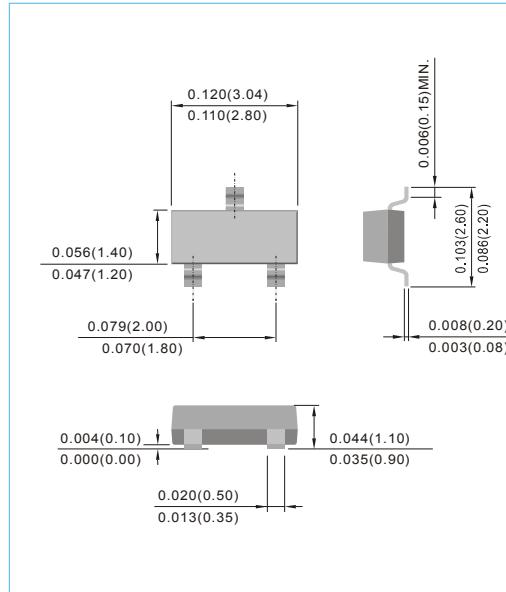

MAXIMUM RATINGS AND THERMAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER			SYMBOL	LIMIT	UNITS
Drain-Source Voltage			V_{DS}	20	V
Gate-Source Voltage			V_{GS}	± 8	V
Continuous Drain Current (Notes 1)	Steady-State Steady-State	$T_A=25^\circ\text{C}$ $T_A=70^\circ\text{C}$	I_D	2.9 2.3	A
Pulsed Drain Current (Notes 1)			I_{DM}	10	A
Power Dissipation (Notes 1)	Steady-State Steady-State	$T_A=25^\circ\text{C}$ $T_A=70^\circ\text{C}$	P_D	700 400	mW
Typical Thermal Resistance (Notes 1)			$R_{\theta JA}$	178	$^\circ\text{C}/\text{W}$
Operating Junction and Storage Temperature Range			T_J, T_{STG}	-55 to + 150	$^\circ\text{C}$

NOTES:

1. Mounted on minimum pad layout.
2. Mounted on 48cm² FR-4PCB.



PJA45N02

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
Static						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	20	-	-	V
Gate Threshold Voltage	$V_{\text{GS(th)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	0.5	0.6	1	V
Drain-Source On-State Resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=3.6\text{A}$	-	40	-	mΩ
		$V_{\text{GS}}=2.5\text{V}, I_{\text{D}}=3.1\text{A}$	-	47	53	
		$V_{\text{GS}}=1.8\text{V}, I_{\text{D}}=1.5\text{A}$	-	55	87	
		$V_{\text{GS}}=1.5\text{V}, I_{\text{D}}=1.0\text{A}$	-	65	-	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}}=16\text{V}, V_{\text{GS}}=0\text{V}$	-	-	0.5	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{GS}}=\pm 8\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Dynamic						
Forward Transconductance	g_{FS}	$V_{\text{DS}}=5\text{V}, I_{\text{D}}=3.1\text{A}$	-	11	-	S
Total Gate Charge	$Q_{\text{g(tot)}}$	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=2.7\text{A}$ $V_{\text{GS}}=4.5\text{V}$	-	6.5	-	nC
Threshold Gate Charge	$Q_{\text{g(th)}}$		-	0.6	-	
Gate-Source Charge	Q_{gs}		-	0.8	-	
Gate-Drain Charge	Q_{gd}		-	1.5	-	
Turn-On Delay Time	$t_{\text{d}_{\text{on}}}$	$V_{\text{DD}}=10\text{V}, V_{\text{GS}}=4.5\text{V}, R_{\text{G}}=6\Omega, R_{\text{L}}=3\Omega$	-	5	-	ns
Turn-Off Delay Time	$t_{\text{d}_{\text{off}}}$		-	30	-	
Turn-On Rise Time	t_{r}		-	6	-	
Turn-Off Fall Time	t_{f}		-	8	-	
Input Capacitance	C_{iss}	$V_{\text{DS}}=10\text{V}, V_{\text{GS}}=0\text{V}$ $f=1.0\text{MHz}$	-	500	-	pF
Output Capacitance	C_{oss}		-	68	-	
Reverse Transfer Capacitance	C_{rss}		-	60	-	
Source-Drain Diode						
Diode Forward Voltage	V_{SD}	$I_{\text{s}}=1\text{A}, V_{\text{GS}}=0\text{V}$	-	0.62	1.2	V



PJA45N02

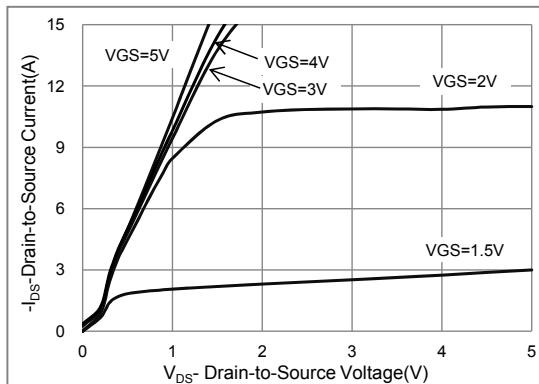


Fig.1 Output Characteristics

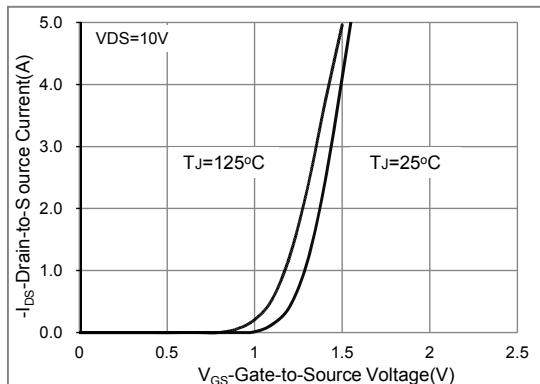


Fig.2 Transfer Characteristics

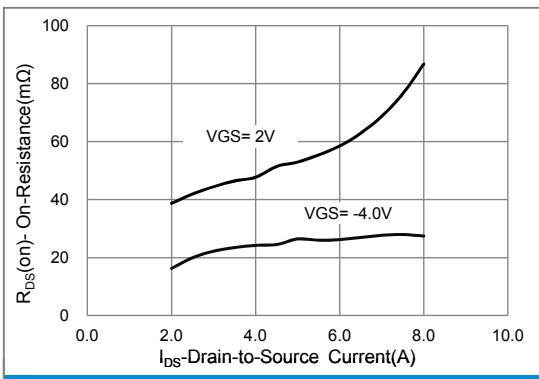


Fig.3 On-Resistance vs. Drain current

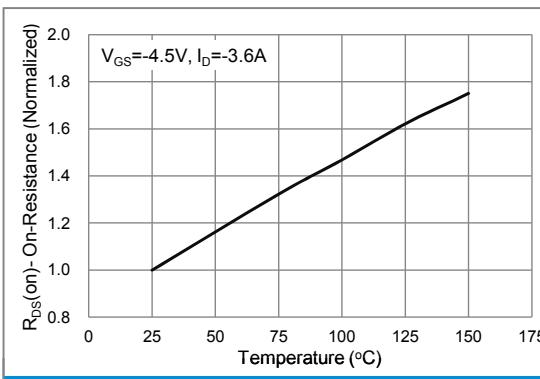


Fig.4 On-Resistance vs. Junction temperature

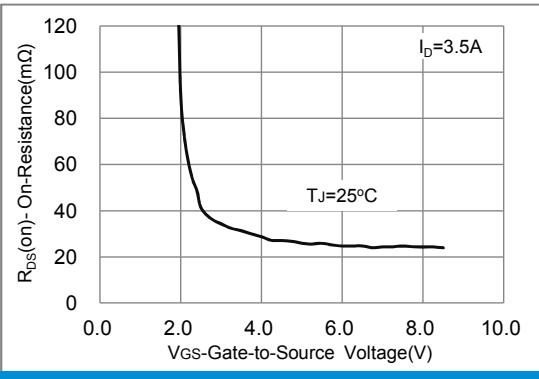


Fig.5 On-Resistance vs. VGS vs Temperature

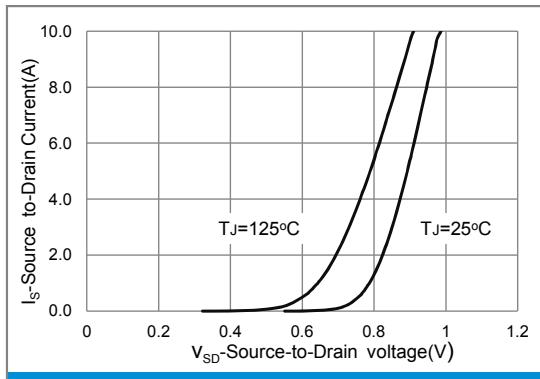


Fig.6 Body Diode Characteristics


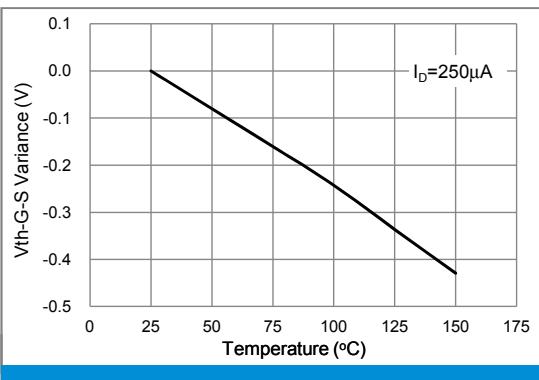


Fig.7 Threshold Voltage Variation with Temperature



PJA45N02

MOUNTING PAD LAYOUT

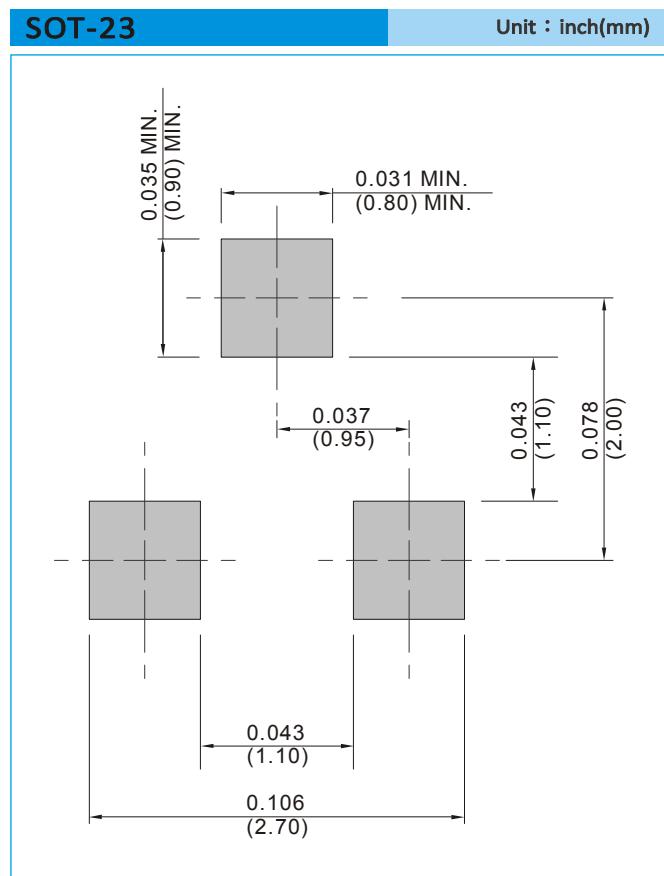

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel



PJA45N02

Part No_packing code_Version

PJA45N02_R1_00001

PJA45N02_R2_00001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			



PJA45N02

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.