

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105 °C





MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 1 S D D 8 8 - X X X X 5 A U - X X

88: 8.8mm	No. of contacts (06-40, 44, 50, 60, 64)	G0:Gold Flash GA:5u"	S0:Selective Au SA:5u"	5:W/O peg & W/O ejector	A:Tray	RoHS	00: Black 01: Gray
		GB:10u"	SB:10u"				
		GC:20u"	SC:20u"				
		GD:30u"	SD:30u"				
		T0:Tin Plated					
		TE:Tin 200u"					

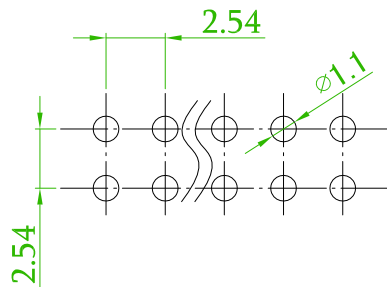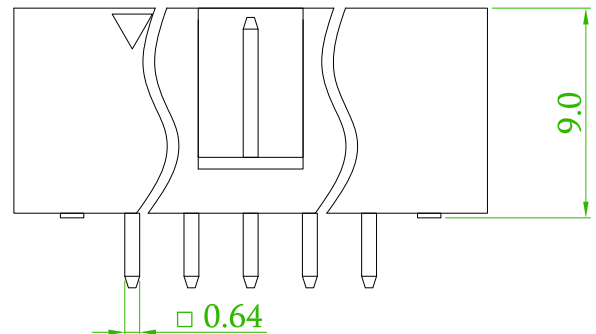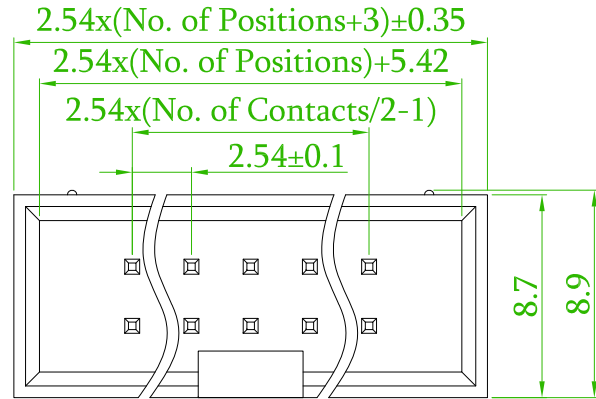

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	2.54mm BOX HEADER V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5BH1SDD88-XXXX5AU-XX			繪圖 DRAWN	Gary
圖號 DRAWING NO.	GN110-GB681	版本 REV.	A	核對 CHECKED	Josh
客戶品號 CUSTOMER P/N		比例 SCALE	1 : 1	承認 APPROVED	Jason
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	