


**PCB LAYOUT  
(BOTTOM VIEW)**

205C-D A N 0-R02  
1 2 3 4

- 1.Type
- D:T/H type
- 2.Contact Plating
- A:Gold Flash
- 3.Shell Plating
- N:Nickel Plating
- 4.RoHS

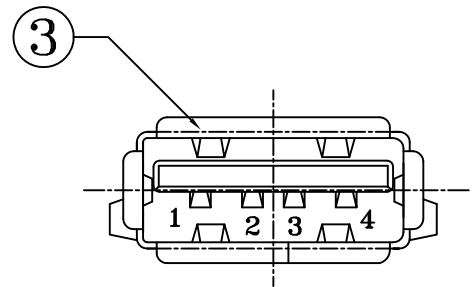

NO.	NAME	MATERIAL	FINISH	REMARK	Q'TY
1	HOUSING	PBT G.F.	WHITE		1
2	PIN TERM.	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	Gold flash ; Ni:40~60 μ <sup>m</sup> ; TIN:120 μ <sup>m</sup> (100% pure Tin of lead free plating)	4
3	SHELL	BRASS T:0.3	NICKEL PLATED	Ni:2~3u	1
4	BOTTOM COVER	PBT G.F.	WHITE		1

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE
1			4		
2			5		
3			6		
4			7		
5			8		
6			9		
7			10		

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2012/08/03
CHECKED	Angel	2012/08/03
APPROVED	Ken	2012/08/03
SIZE	A4	REV. 1.0



www.attend.com.tw

DRAWN NAME:		USB A Receptacle Straight Dip Type	
PRODUCT NO.	205C-DAN0-R02		
FILE NAME	205C-DAN0-R02_B_1		

△	Revise:				
△	Revise:				
△	Revise:				