
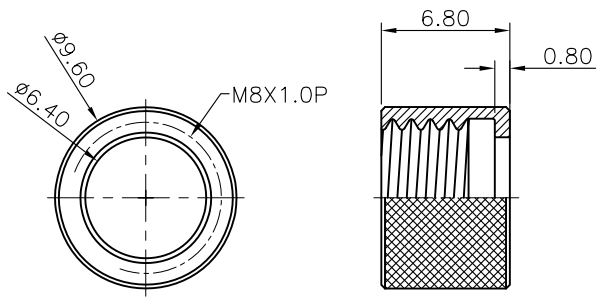
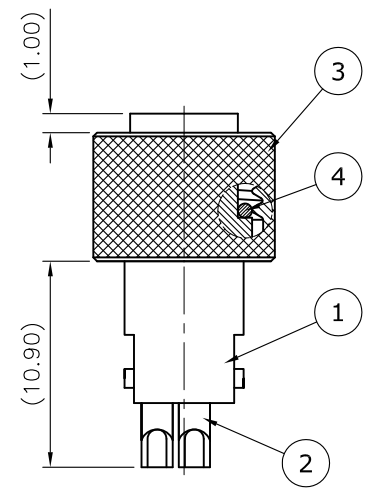


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2016/08/15

SPECIFICATION:

1. CURRENT RATING: 5A
2. VOLTAGE: 125V
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

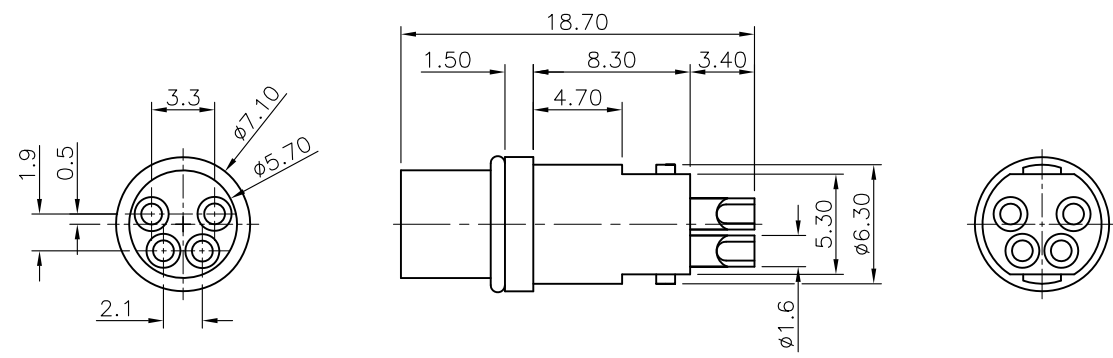

NUT

4	O-RING	NBR, Black
3	NUT	Brass, Nickel plated
2	CONTACT	Bronze, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°



WWW.ATTEND.COM.TW

DRAWN	Tim	2016/08/15	DRAWN NAME:	
CHECKED	Fros	2016/08/15	M8 A- Code Plug for Cable ,	
APPROVED	Ken	2016/08/15	PRODUCT NO.	219A-04FO0
SCALE	2.5/1	SHEET	1/1	SIZE
			FILE NAME	219A-04FO0_B_1