SWITCH CIRCUIT		MATERIAL AND FINISH AS BELOW					
WHEN CARD IS EJECTED	WHEN CARD IS INSERTED	A	Housing	PBT UL94V-0, Color: Black	E	Epoxy Base	Epoxy Black
		B	Contact	Brass C3604, Contact Area:10u″ Gold Plating Over Nickel	F	Main Body	Aluminum alloy , Nickel Plating
		C	Shell	Aluminum alloy , Nickel Plating	G	O-Ring	Silicone Black
		D	Nut	Aluminum alloy , Nickel Plating	H	Gland Cage	POM White



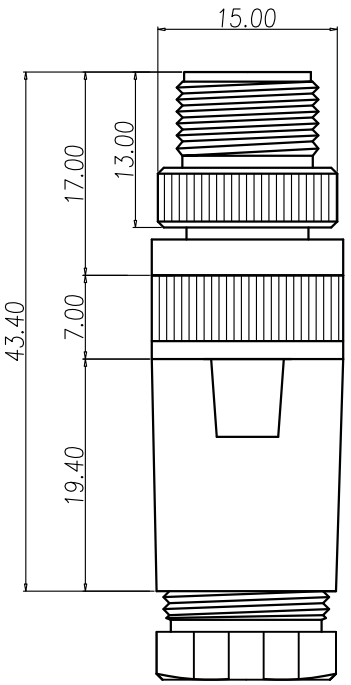

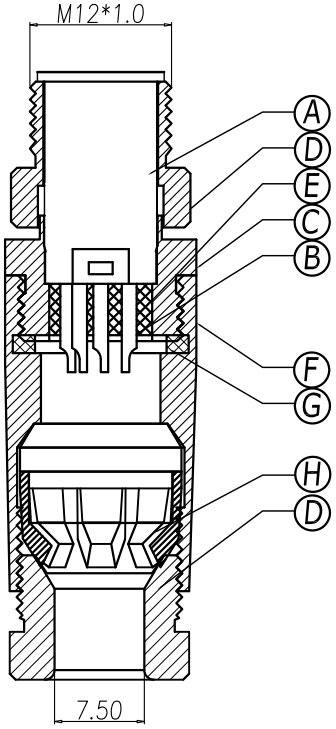

SPECIFICATION:

1. ELECTRICAL
1.1 Current Rating: 5A per pin
1.2 Voltage Rating: 125V
1.3 Water Proof: IP X7

2. ENVIRONMENTAL
△2 2.1 Operating temperature range: -40℃~+85℃

P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12
PIN ASSIGNMENT											

216A-08MF0	M12 A Code Plug for Cable, 8Pin Male For Field Installable, Contact: 10u″ Gold Plating
PRODUCT NO.	DESCRIPTION

REV.	DESCRIPTION	DATE
△2	ECR1700027	2017/10/26
△1	INITIAL RELEASE	2013/12/24

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	±5°
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWED	UNIT: mm
DRAWN	Willis	2013/12/24
CHECKED	Angel	2013/12/24
APPROVED	Ken	2013/12/24

ATTEND
www.attend.com.tw

DRAWN NAME: M12 A- Code Plug for Cable 8Pin Male For Field Installable

PRODUCT NO.	216A-08MF0
FILE NAME	216A-08MF0_B_2

SIZE A4 REV. 1.0