


正视图

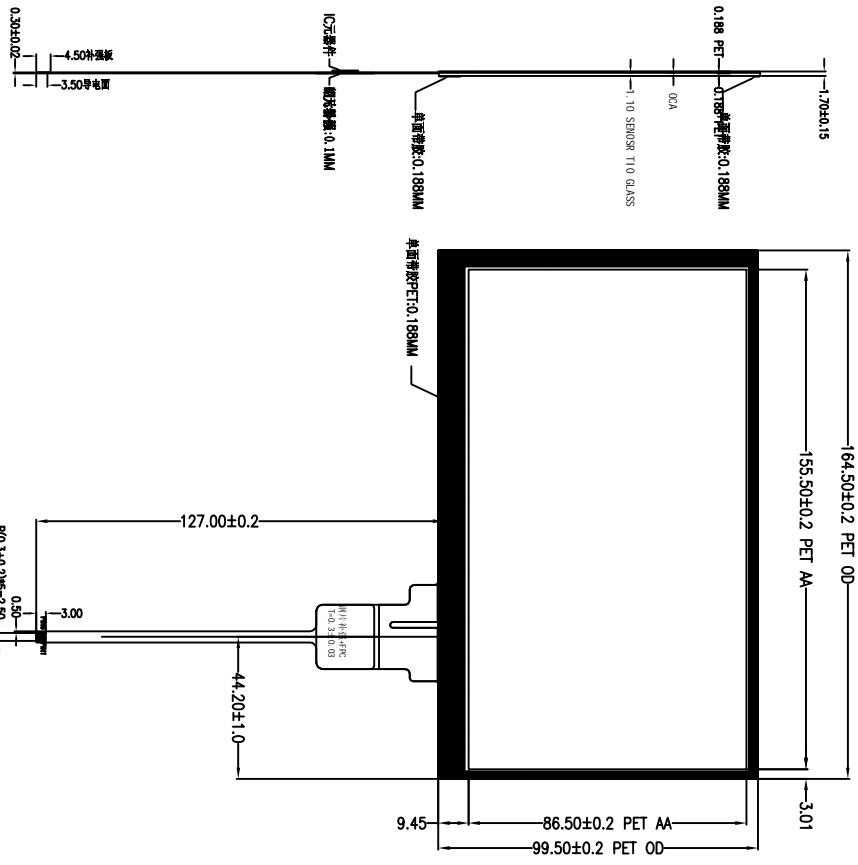


侧视图

背视图

- 技术参数:
1. PET+ITO Glass+单面带胶PET+FPC  
ITO GLASS: 1.1mm  
PET: 0.188mm  
IC: GT911 (10\*17)  
引线: FPC (PINCH=0.5mm)
  2. 总厚度: 1.70 ± 0.15mm
  3. 工作电压: 2.8V-3.3 V
  4. 透光率: ≥ 85 %
  5. 表面硬度: 3H
  6. 工作环境: -20 °C~+70 °C, ≤ 90%RH
  7. 储存环境: -30 °C~+80 °C, ≤ 90%RH
  8. 未注尺寸公差按 ± 0.2mm

I2c Interface	
Shutdown	1
VCC	2
GND	3
INT	4
SDA	5
SCL	6



# FPC: HST127T17R10317-2 (不带座子)

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES MILLIMETERS  
TOLERANCES: ANGLES ±1°  
.XXX" ±.005"  
.XX" ±.02"  
OR  
0.Xmm ±0.5mm  
0.XXXmm ±0.13mm



**深圳市華順通科技有限公司**  
SHENZHEN HST TECHNOLOGY CO., LTD  
Tel: (86-755) 29643468 Fax: (86-755) 29643299  
http://www.hsttp.com

DRAWN BY: **FML**

DATE: 16-08-19

DRAWING NO.:

CHECKED BY:

DATE:

**HST-CPG7.0BD**



REV

DESCRIPTION

APPROVED BY: **张耀平**

DATE:

TITLE:

SHEET NO.:

1 OF 1