


R75L, Film, Metallized Polypropylene, General Purpose, 0.047 uF, 10%, 560 VDC, 85°C, Lead Spacing = 10mm

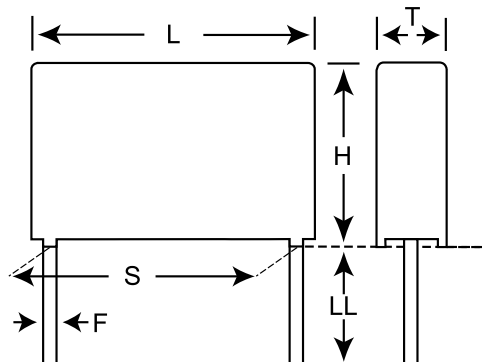

Dimensions

Dimension	Value
L	13mm +0.3mm
H	11mm +0.1mm
T	5mm +0.2mm
S	10mm +/-0.4mm
LL	30mm +5mm
F	0.8mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Bag
-------------------	-----------

General Information

Series:	R75L
Dielectric:	Metallized Polypropylene
Style:	Radial
Features:	Pulse, Capacitive Power Supply
RoHS:	Yes
Lead:	Wire Leads
AEC-Q200:	No

Specifications

Capacitance:	0.047 uF
Capacitance Tolerance:	10%
Voltage AC:	250 VAC
Voltage DC:	560 VDC, 336 VDC (105C)
Temperature Range:	-55/+105°C
Rated Temperature:	85°C
Dissipation Factor:	4% 1kHz, 6% 10kHz, 25% 100kHz
Insulation Resistance:	640 GOhms
Max dV/dt:	1500 V/us
Inductance:	10 nH