


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

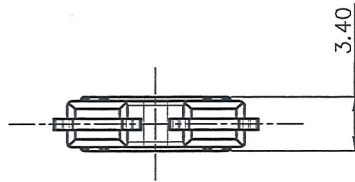

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 10A

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009

2.Pitch : 7.30mm, Poles : 02P



3.Withstanding voltage : AC2200V/1Min

4.Operating temperature: -40°C~+105°C

5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm				0.1/10	
To 6	Over 6 TO 10	Over 10 TO 24	To 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6.RoHS Compliance

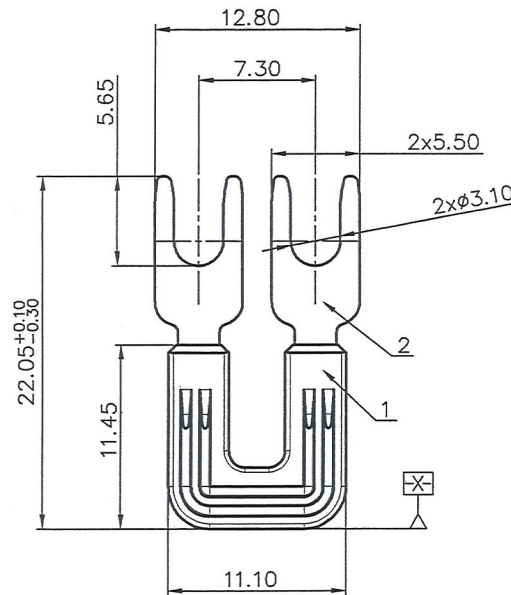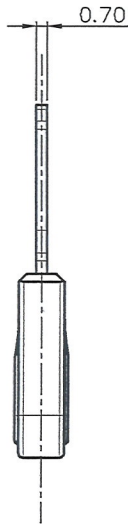

DG048 - 02P - 1Y - 00A (H)
 (Series No.)(Poles)(Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

宁波高松电子有限公司
 2017.10.26
 (仅限内部使用,对外无效)

2	Metal	Brass	Ni Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: <i>Ahew/2017.10.20</i>	NAME:	DG048-02P-1Y-00A(H)	
	CHKD: <i>Denny/2017.10.20</i>	TITLE:	CUSTOMER DRAWING	REV TO
	DRFT: <i>LJB/2017.10.19</i>	DRAWING NO.:	DG048-C01	SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE	1:1