


10A/15A/25A/35A/50A BRIDGE RECTIFIER

FEATURES

- Surge overload 240~500A peak
- Low forward voltage drop
- Case to terminal isolation voltage 2000V

MECHANICAL DATA

- Case: KBPC
- Case material: Metal case with electrically isolated epoxy
- Terminals: Plated leads solderable per MIL-STD-202, Method 208
- Weight: 32 grams (approximate)

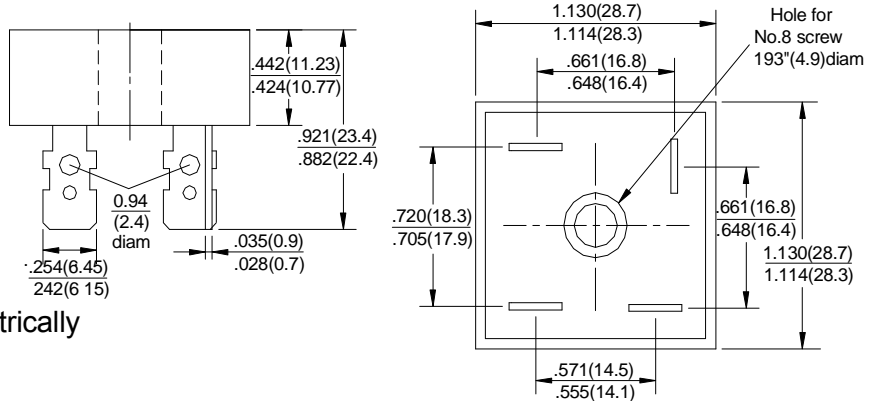

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	KBPC							Unit
		10005	1001	1002	1004	1006	1008	1010	
Maximum recoverable peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC block voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current @ $T_C=55^\circ\text{C}$	I_F	KBPC10 serial: 10A; KBPC15 serial: 15A KBPC25 serial: 25A; KBPC35 serial: 35A KBPC50 serial: 50A							A
Peak forward surge current 8.3ms single half sine-wave super imposed on rated load	I_{FSM}	KBPC10 serial: 240A; KBPC15 serial: 300A KBPC25 serial: 400A; KBPC35 serial: 400A KBPC50 serial: 500A							A
Operating temperature range	T_J	-55 ~ +125							$^\circ\text{C}$
Storage temperature range	T_{STG}	-55 ~ +125							$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Max.	Unit	Conditions
Maximum forward voltage drop per element	V_F	1.1	V	$I_F=5.0\text{A}$ for KBPC10 serial $I_F=7.5\text{A}$ for KBPC15 serial $I_F=12.5\text{A}$ for KBPC25 serial $I_F=17.5\text{A}$ for KBPC35 serial $I_F=25\text{A}$ for KBPC50 serial
Maximum reverse current	I_R	10	μA	$V_R=V_{DC}$

Note:

1. Resistive or inductive load 60Hz;
2. For capacitive load derate by 20%.

10A/15A/25A/35A/50A BRIDGE RECTIFIER

Typical Characteristics

FIG.1-MAXIMUM FORWARD SURGE CURRENT

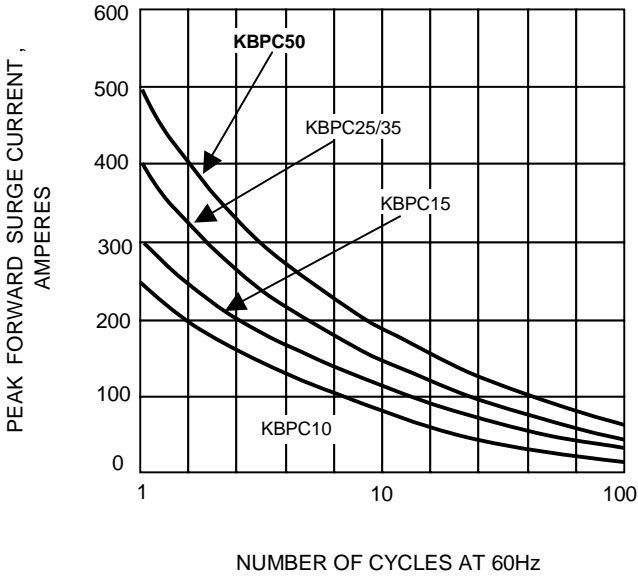


FIG.2- DERATING CURVE
OUTPUT RECTIFIED CURRENT

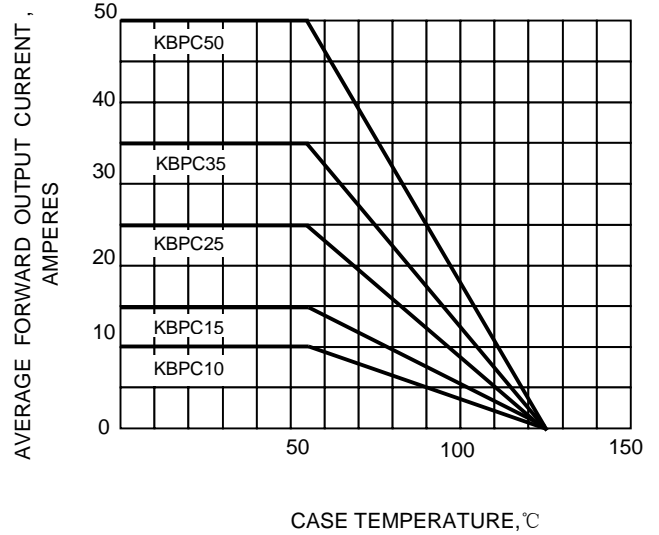


FIG.3-TYPICAL FORWARD
CHARACTERISTICS

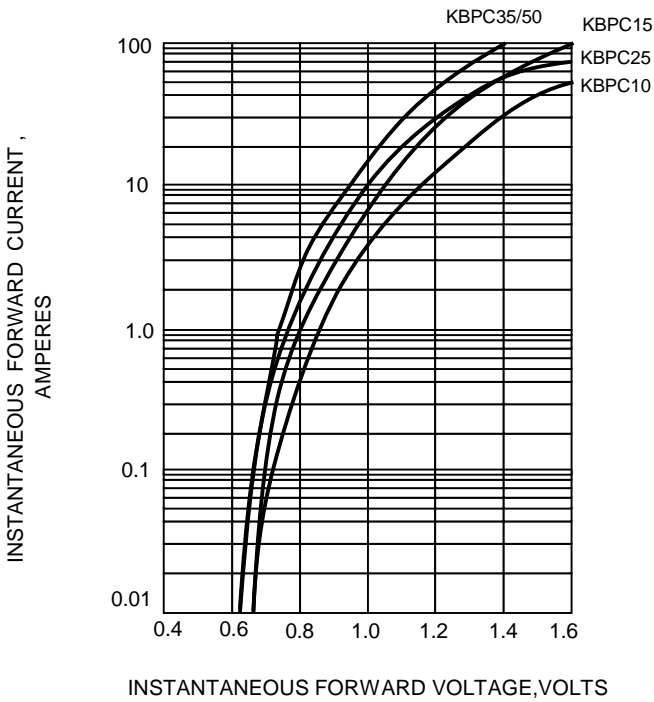


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

