


RoHS COMPLIANT

螺帽鎖到底:L:55.3±0.3  
L:56.3±0.3(含防塵蓋吊繩)

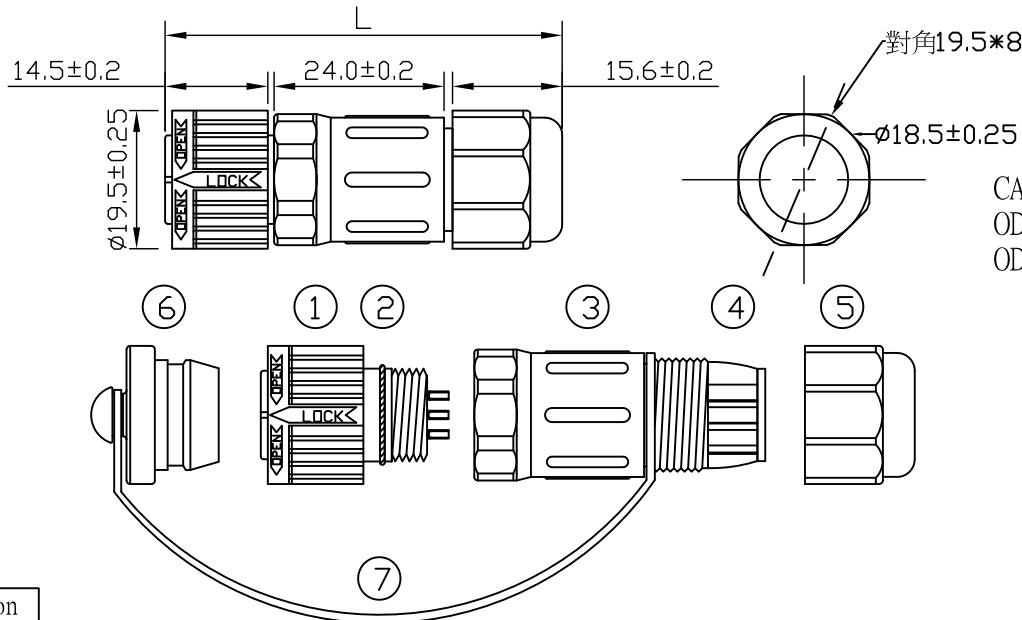


CABLE 線徑:  
OD:4.0~8.0mm  
OD:8.0~10.0mm

Water Proof:IP68  
UV Resist

| Pin Select            | Electrial Specification |
|-----------------------|-------------------------|
| LJ-125180AS-PF-02~05P | 10A/250V                |
| LJ-125100AS-PF-04~06P | 3A/250V                 |
| LJ-125210AS-PF-02+05P | 7A+3A/250V              |
| LJ-125075AS-PF-08~18P | 2A/250V                 |

|    |             |                                |         |
|----|-------------|--------------------------------|---------|
| 7  | Rope        | Rubber EPDM                    | BLACK(0 |
| 6  | Dust Cover  | Rubber EPDM                    | BLACK(0 |
| 5  | Sealing Nut | PA66-UL94V-1 UV Resist         | BLACK(0 |
| 4  | Rubber Seal | Rubber EPDM                    | BLACK(0 |
| 3  | Body Housig | PA66-UL94V-1 UV Resist         | BLACK(0 |
| 2  | O-Ring      | Silicon Rubber                 | BLACK(0 |
| 1  | Connector   | PA66-UL94V-0/Barss Gold Plated | WHITE(9 |
| NO | PART NAME   | PART NO                        | COLOR   |

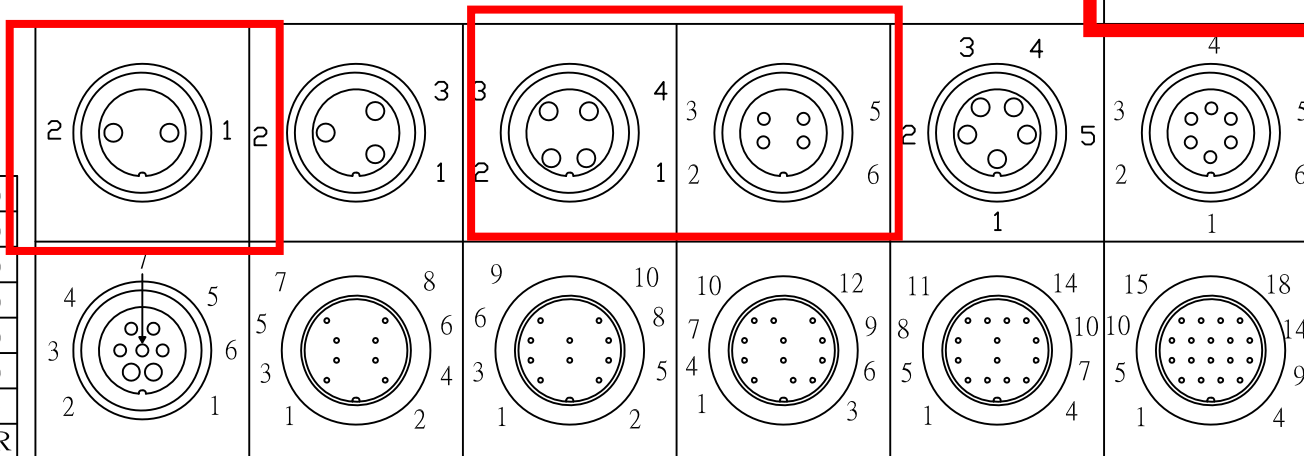

|   |         |   |           |                                  |
|---|---------|---|-----------|----------------------------------|
| 設計 DR.<br>Marco<br>2018/08/20             | 核准 APP. | 容許公差<br>.XXX ±0.10<br>.XX ±0.25<br>.X ±0.38<br>X ±0.50<br>ANG ±3° | TOLERANCE | 品名<br>ARTICLE 快速插拔型防水连接器-母插頭(線端) |
| 版本說明 REVISION NOTE<br>--- Preliminary --- |         | 圖號<br>DWG NO. L170124001  |           | 單位 UNIT<br>mm                    |
| KINSUN                                    |         | 比例 SCALE 1.5/1  |           | 張數 SHEET 1/1                     |
|   |         | 版本 REV. A1  |           |                                  |