


- NOTES:**
1. Current Rating: 1.0A (Signal PIN 2 3 4); 1.8A (Power PIN 15)
 2. Contact Resistance: 40mΩ Max.
 3. Insulation Resistance: 100MΩ Min.
 4. Dielectric Withstanding: 100 V AC Min.
 5. Durability: 10000 cycles.
 6. Connector Mating forces: 35N Max (3.57Kgf).
 7. Connector Unmating force: 8N Min (0.30Kgf).
 8. Product Meet The Request of the RoHS

Order Information

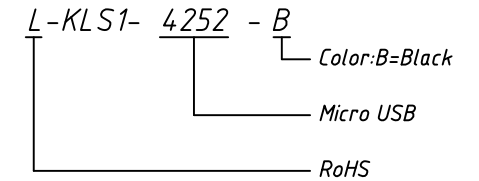

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.50	UNITS	mm	CONN MICRO USB 5P Clip type 0.8mm
.X ±0.25	SCALE	1:1	
.XX ±0.10	Draw by:	Jenny	
ANGLE TOLERANCE	Check by:		KLS P/N: L-KLS1-4252-B
X. ±5°	Date	2018-03-01	NingBo KLS ELECTRONIC CO.,L TD.
.X ±3°	SHEET	1 OF 1	
.XX ±2°			