

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 44.2 mm
 - Effective Area (A_e): 20.6mm²
 - Effective Area (A_{Min}): 20.6mm²
 - Effective Volume (V_e): 910mm³
- Approximate weight : 4.6g/pc**




T1807 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	1200+30%/-20%	CF196T1807
CF139	2100 ±20%	1250+30%/-20%	CF139T1807
CF130	3000 ±20%	1750+30%/-20%	CF130T1807
CF195A	5000 ±20%	2900+30%/-20%	CF195AT1807
CF265	5000 ±20%	2900+30%/-20%	CF265T1807
CF190	6000 ±20%	3500+30%/-20%	CF190T1807
CF197	7000 ±20%	4100+30%/-20%	CF197T1807
CF199	9000 ±20%	5300 ±30%	CF199T1807

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	17.5	18.0	17.0
B	11.05	11.35	10.75
C	7.0	7.2	6.8

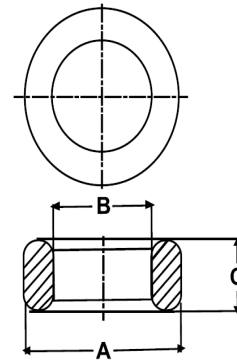

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf