

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 54.15 mm
- Effective Area (A_e): 34.8mm²
- Effective Area (A_{Min}): 34.8mm²
- Effective Volume (V_e): 1884mm³

Approximate weight : 8.94g/pc




T2208 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 \pm 20%	1600+30%/-20%	CF196T2208
CF139	2100 \pm 20%	1700+30%/-20%	CF139T2208
CF130	3000 \pm 20%	2400+30%/-20%	CF130T2208
CF195A	5000 \pm 20%	4000+30%/-20%	CF195AT2208
CF265	5000 \pm 20%	4000+30%/-20%	CF265T2208
CF190	6000 \pm 20%	4800+30%/-20%	CF190T2208
CF197	7000 \pm 20%	5650+30%/-20%	CF197T2208
CF199	9000 \pm 20%	7250 \pm 30%	CF199T2208

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	22.1	22.5	21.7
B	13.7	14.0	13.4
C	8.0	8.3	7.7

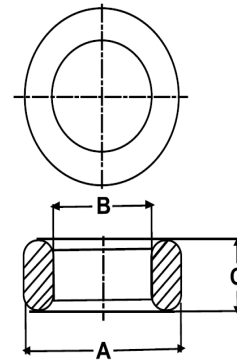

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf