

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 76.0 mm
- Effective Area (A_e): 38.9mm²
- Effective Area (A_{Min}): 38.9mm²
- Effective Volume (V_e): 2956mm³

Approximate weight : 15.0g/pc




T3106 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 \pm 20%	1300+30%/-20%	CF196T3106
CF139	2100 \pm 20%	1350+30%/-20%	CF139T3106
CF130	3000 \pm 20%	1900+30%/-20%	CF130T3106
CF195A	5000 \pm 20%	3200+30%/-20%	CF195AT3106
CF265	5000 \pm 20%	3200+30%/-20%	CF265T3106
CF190	6000 \pm 20%	3850+30%/-20%	CF190T3106
CF197	7000 \pm 20%	4500+30%/-20%	CF197T3106
CF199	9000 \pm 20%	5800 \pm 30%	CF199T3106

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	31.5	32.5	30.5
B	19.0	19.6	18.4
C	6.35	6.65	6.05

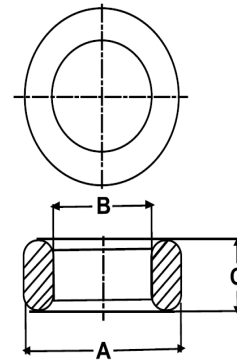

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf