

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

**Effective Parameters irrespective of material grade (per piece)**

- Effective Length ( $L_e$ ): 63.6 mm
- Effective Area ( $A_e$ ): 57.5mm<sup>2</sup>
- Effective Area ( $A_{Min}$ ): 57.5mm<sup>2</sup>
- Effective Volume ( $V_e$ ): 3657mm<sup>3</sup>

**Approximate weight : 17.1g/pc**




## T2610 OL (Un- Coated)

**Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C**

| Material Grade | Initial Permeability ( $\mu_{iac}$ ) | AL Value (nH)   | Ordering code |
|----------------|--------------------------------------|-----------------|---------------|
| CF196          | 2000 $\pm$ 20%                       | 2250+30%/-20%   | CF196T2610    |
| CF139          | 2100 $\pm$ 20%                       | 2350+30%/-20%   | CF139T2610    |
| CF130          | 3000 $\pm$ 20%                       | 3400+30%/-20%   | CF130T2610    |
| CF195A         | 5000 $\pm$ 20%                       | 5700+30%/-20%   | CF195AT2610   |
| CF265          | 5000 $\pm$ 20%                       | 5700+30%/-20%   | CF265T2610    |
| CF190          | 6000 $\pm$ 20%                       | 6800+30%/-20%   | CF190T2610    |
| CF197          | 7000 $\pm$ 20%                       | 7900+30%/-20%   | CF197T2610    |
| CF199          | 9000 $\pm$ 20%                       | 10200 $\pm$ 30% | CF199T2610    |

## Dimensions(Un-coated Core)

| Dimension | Nominal (in mm) | Maximum (in mm) | Minimum (in mm) |
|-----------|-----------------|-----------------|-----------------|
| A         | 26.0            | 26.55           | 25.45           |
| B         | 14.5            | 14.85           | 14.15           |
| C         | 10.0            | 10.3            | 9.7             |

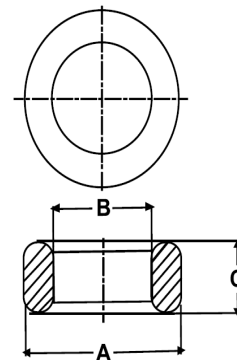

For general terms and conditions please visit: [http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6\\_GTC.pdf](http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf)

**Regd. Office & Works:** Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com