

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 72.6 mm
- Effective Area (A_e): 46.7mm²
- Effective Area (A_{Min}): 46.7mm²
- Effective Volume (V_e): 3393mm³

Approximate weight : 5.0g/pc




T2908 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 \pm 20%	1600+30%/-20%	CF196T2908
CF139	2100 \pm 20%	1700+30%/-20%	CF139T2908
CF130	3000 \pm 20%	2400+30%/-20%	CF130T2908
CF195A	5000 \pm 20%	4000+30%/-20%	CF195AT2908
CF265	5000 \pm 20%	4000+30%/-20%	CF265T2908
CF190	6000 \pm 20%	4850+30%/-20%	CF190T2908
CF197	7000 \pm 20%	5600+30%/-20%	CF197T2908
CF199	9000 \pm 20%	7300 \pm 30%	CF199T2908

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	29.6	30.3	28.9
B	18.4	19.0	17.8
C	8.5	8.9	8.1

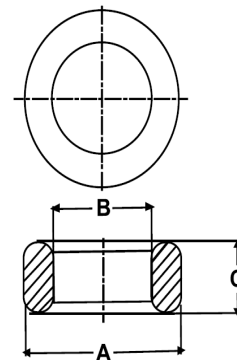

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com