

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 110.0 mm
- Effective Area (A_e): 91.0mm²
- Effective Area (A_{Min}): 91.0mm²
- Effective Volume (V_e): 10010mm³

Approximate weight : 51.4g/pc




T4511 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	2100+30%/-20%	CF196T4511
CF139	2100 ±20%	2200+30%/-20%	CF139T4511
CF130	3000 ±20%	3100+30%/-20%	CF130T4511
CF195A	5000 ±20%	5200+30%/-20%	CF195AT4511
CF265	5000 ±20%	5200+30%/-20%	CF265T4511
CF190	6000 ±20%	6200+30%/-20%	CF190T4511
CF197	7000 ±20%	7300+30%/-20%	CF197T4511
CF199	9000 ±20%	10400 ±30%	CF199T4511

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	45.0	46.35	43.65
B	28.0	28.8	27.2
C	11.0	11.4	10.6

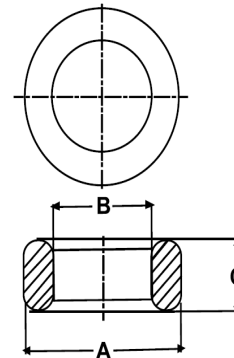

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com