

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 110.5 mm
- Effective Area (A_e): 150.2mm²
- Effective Area (A_{Min}): 150.2mm²
- Effective Volume (V_e): 16597mm³

Approximate weight : 83g/pc




T4518 OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 \pm 20%	3400+30%/-20%	CF196T4518
CF139	2100 \pm 20%	3600+30%/-20%	CF139T4518
CF130	3000 \pm 20%	5100+30%/-20%	CF130T4518
CF195A	5000 \pm 20%	8500+30%/-20%	CF195AT4518
CF265	5000 \pm 20%	8500+30%/-20%	CF265T4518
CF190	6000 \pm 20%	10200+30%/-20%	CF190T4518
CF197	7000 \pm 20%	11900+30%/-20%	CF197T4518

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	45.0	46.35	43.65
B	28.0	28.0	27.2
C	18.0	18.4	17.6

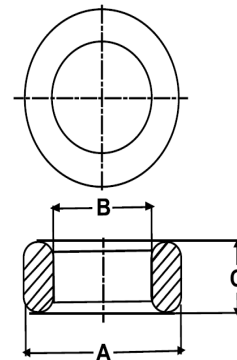

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf