

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.
Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 152.4 mm
 - Effective Area (A_e): 146.3mm²
 - Effective Area (A_{Min}): 146.3mm²
 - Effective Volume (V_e): 22296mm³
- Approximate weight : 113.3g/pc**




T5818OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 \pm 20%	2400+30%/-20%	CF196T5818
CF139	2100 \pm 20%	2500+30%/-20%	CF139T5818
CF130	3000 \pm 20%	3600+30%/-20%	CF130T5818
CF195A	5000 \pm 20%	6000+30%/-20%	CF195AT5818
CF265	5000 \pm 20%	6000+30%/-20%	CF265T5818
CF190	6000 \pm 20%	7200+30%/-20%	CF190T5818
CF197	7000 \pm 20%	8400+30%/-20%	CF197T5818
CF199	9000 \pm 20%	10800 \pm 30%	CF199T5818

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	58.3	59.3	57.3
B	40.8	41.6	40.0
C	17.6	18.1	17.1

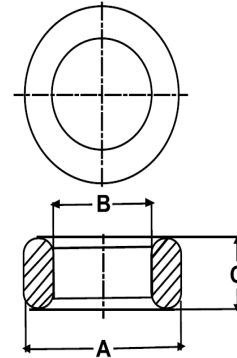

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf