

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc, As per IEC standards.

Effective Parameters irrespective of material grade (per piece)

- Effective Length (L_e): 144.6 mm
- Effective Area (A_e): 157.4mm²
- Effective Area (A_{Min}): 157.4mm²
- Effective Volume (V_e): 22760mm³

Approximate weight : 116.5g/pc




T6113OL (Un- Coated)

Test Conditions: 10kHz/150mV/CFR COIL,N=01/Lo=Zero/25°C

Material Grade	Initial Permeability (μ_{iac})	AL Value (nH)	Ordering code
CF196	2000 ±20%	2700+30%/-20%	CF196T6113
CF139	2100 ±20%	2900+30%/-20%	CF139T6113
CF130	3000 ±20%	4100+30%/-20%	CF130T6113
CF195A	5000 ±20%	6800+30%/-20%	CF195AT6113
CF265	5000 ±20%	6800+30%/-20%	CF265T6113
CF190	6000 ±20%	8200+30%/-20%	CF190T6113
CF197	7000 ±20%	9600+30%/-20%	CF197T6113
CF199	9000 ±20%	11600 ±30%	CF199T6113

Dimensions(Un-coated Core)

Dimension	Nominal (in mm)	Maximum (in mm)	Minimum (in mm)
A	61.0	61.9	59.1
B	35.6	36.5	34.7
C	12.7	13.0	12.4

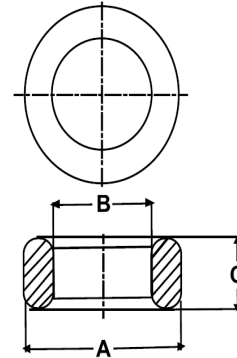

For general terms and conditions please visit: http://www.cosmoferrites.com/Downloads/Downloads/bcb70e7c-ae33-40ec-a881-0d5120db57b6_GTC.pdf

Regd. Office & Works: Jabli, Distt. Solan, Himachal Pradesh – 173 209 (India)

Tel: +91 1792 277231/32/36, Fax: +91 1792 277234

E-mail: sales@cosmoferrites.com